




FITTING INSTRUCTIONS FOR ECS0030BK ENGINE CASE SLIDERS HONDA CBR600RR 2007- (RIGHT-HAND SIDE ONLY)

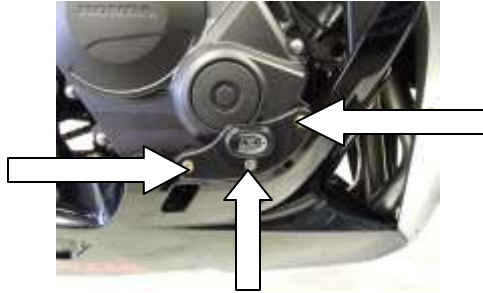

Please note that the way the kit is packed does not necessarily represent the way of mounting to the bike

Please note that in cases where kits are packed with rubber washers holding the components onto the bolt – *the rubber washers should be thrown away!*

You will need the following tools to complete this job.

Set off metric allen keys.

Socket set to include 8mm A/F socket/wrench .

Right-hand side (as you sit on bike)

- Remove three M6 bolts as positioned (arrowed) above.
- Insert new cap head screws with washers through holes in engine-case slider so head of bolt goes into deep counter-bore (shortest bolt goes into forward hole, mid length bolt goes into mid hole and longest bolt goes into most rear hole).
- Offer assembly up to bike as shown above.
- Engage bolts into threads and tighten evenly to manufactures specified torque.
- Fit bubble sticker as shown above.

CONSUMER NOTICE

The catalogue description and any exhibition of samples are only broad indications of the Products and R&G may make design changes which do not diminish their performance or visual appeal and supplying them in such state shall conform to the order. The Buyer acknowledges no representation or warranty (other than as to title) has been given or will apply to the Products other than those in R&G's order or confirmation and the Buyer confirms it has chosen the Products as being of merchantable quality and suitable for its particular purposes. Where R&G fits the Products or undertakes other services it shall exercise reasonable skill and care and rectify any fault free of charge unless the workmanship has been disturbed. The Buyer is responsible for ensuring that the warranty on the motorcycle is not affected by the fitting of the Products. On return of any defective Products R&G shall at its option either supply a replacement or refund the purchase money but shall not be liable if the Products have been modified or used or maintained otherwise than in accordance with R&G's or manufacturer's instructions and good engineering practice or if the defect arises from accident or neglect. Other than identified above and subject to R&G not limiting its liability for causing death and personal injury, it shall not be liable for indirect or consequential loss and otherwise its liability shall be limited to the amounts paid by the Buyer for the Products or the fitting or service concerned. These terms do not affect the Buyer's statutory rights.

R&G RACING RETURNS POLICY (NON-FAULTY GOODS)

Returns must be pre-authorized (if not pre-authorized the return will be rejected). Goods may only be returned direct to us if they were purchased direct from us (customer must prove if necessary). Otherwise to be returned to original vendor. Goods must be in resellable condition, in the opinion of R&G Racing. All returns are subject to a 25% restocking and handling fee (25% of the gross value exc. P&P – at the prevailing price at time of purchase). The customer must pay any and all carriage charges. No returns of discontinued products, unless within 14 days of purchase. This policy does not affect your statutory rights and does not refer to faulty goods.

R&G Racing
Unit 1, Shelleys Lane, East Worldham, Alton, Hampshire, GU34 3AQ

Tel: +44 (0) 1420 89007 || Fax : +44 (0) 1420 87301 || Email: info@rg-racing.com



FRANCE
INSTRUCTIONS DE MONTAGE DE ECS0030BK
HONDA CBR600RR 2007- (Côté Droit)

LA PRESENTATION DES PIECES R&G DANS L'EMBALLAGE N'EST PAS TOUJOURS IDENTIQUE AU SENS DE MONTAGE.

Merci de noter que dans le cas où les protections sont assemblées avec une bague en caoutchouc, merci de bien vouloir le retirer lors du montage des pièces sur la moto.

Droit

- Enlever les 3 vis M6 (voir photo)
- Glisser une rondelle sur chacune des 3 vis R&G puis les insérer dans la protection. (attention il y a 3 longueurs de vis différentes- pour vous aider la plus petite vis est à placer vers l'avant de la moto, la plus longue vers l'arrière et la moyenne au milieu)
- Placer l'ensemble sur la moto
- Serrer les vis à la main dans le carter puis serrer au couple de serrage d'origine.

R&G Racing
Unit 1, Shelleys Lane, East Worldham, Alton, Hampshire, GU34 3AQ

Tel: +44 (0) 1420 89007 || Fax : +44 (0) 1420 87301 || Email: info@rg-racing.com