





Fitting Instructions for SRG0009 Radiator Guard
BMW R1200GS 2013



In This Kit There Should Be
2x Radiator Guard (SRG0009 Left & Right)
2x 100mm Lengths of self-adhesive Foam

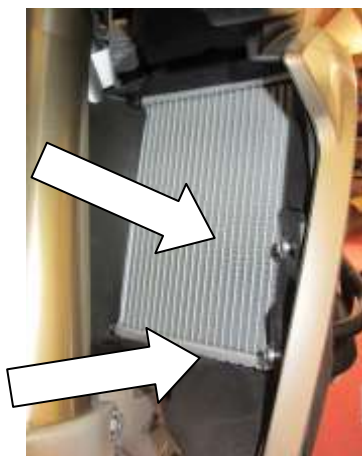

Picture 1

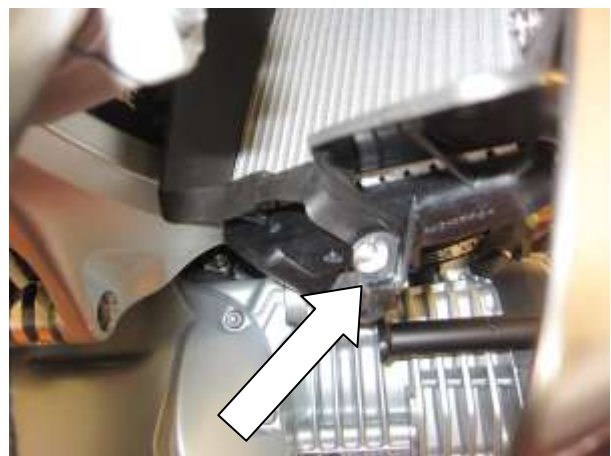

Picture 2



Picture 3



Picture 4



Picture 5



Picture 6



Picture 7



TOOLS REQUIRED

- Socket set to include 4mm socket & wrench.

FITTING INSTRUCTIONS

Left side (as you sit on bike)

- To fit the radiator guard to the bike cut the foam strip provided into 10mm wide pieces and stick them to the back of the radiator guard frame, so that they sit between the radiator guard and the radiator.
- Remove the two bolts that secure the side of the plastic radiator surround in place on the back side of the bodywork, as arrowed in picture 1.
- Remove the bolt that secures the bottom of the plastic radiator surround in place, as arrowed in picture 2.
- Take the left side radiator guard. *This can be identified by having the slot on the left side of the frame, as shown in picture 3. (R&G aluminium mesh radiator guard shown)*
- Gently pull the plastic radiator surround away from the bottom of the radiator (this can be removed to make it easier, but is not necessary) and slide the R&G Radiator Guard up behind it, as shown in picture 4.
- Position the radiator guard in order to cover the entire radiator, ensuring the two tabs at the top locate under the plastic radiator surround at the top, as shown in picture 5.
- Re-position the plastic radiator surround back in place parallel to the radiator. The plastic tab on the left side should locate through the slot on the side of the radiator guard, as shown in picture 6.
- The lower mounting hole on the plastic radiator surround should now align with the radiator mount, sandwiching the mounting hole of the radiator guard in between, as shown in picture 7. Re-fit the original bolt.
- Ensure the radiator guard is correctly positioned before re-fitting the original two bolts on the side of the plastic radiator surround.
- Tighten all bolts evenly.

To fit the radiator guard on the right side of the bike, follow the same procedure.

ISSUE 1 15/05/2013 (AR)

CONSUMER NOTICE

The catalogue description and any exhibition of samples are only broad indications of the Products and R&G may make design changes which do not diminish their performance or visual appeal and supplying them in such state shall conform to the order. The Buyer acknowledges no representation or warranty (other than as to title) has been given or will apply to the Products other than those in R&G's order or confirmation and the Buyer confirms it has chosen the Products as being of merchantable quality and suitable for its particular purposes. Where R&G fits the Products or undertakes other services it shall exercise reasonable skill and care and rectify any fault free of charge unless the workmanship has been disturbed. The Buyer is responsible for ensuring that the warranty on the motorcycle is not affected by the fitting of the Products. On return of any defective Products R&G shall at its option either supply a replacement or refund the purchase money but shall not be liable if the Products have been modified or used or maintained otherwise than in accordance with R&G's or manufacturer's instructions and good engineering practice or if the defect arises from accident or neglect. Other than identified above and subject to R&G not limiting its liability for causing death and personal injury, it shall not be liable for indirect or consequential loss and otherwise its liability shall be limited to the amounts paid by the Buyer for the Products or the fitting or service concerned. These terms do not affect the Buyer's statutory rights.

R&G RACING RETURNS POLICY (NON-FAULTY GOODS)

Returns must be pre-authorized (if not pre-authorized the return will be rejected). Goods may only be returned direct to us if they were purchased direct from us (customer must prove if necessary). Otherwise to be returned to original vendor. Goods must be in re-sellable condition, in the opinion of R&G Racing. All returns are subject to a 25% restocking and handling fee (25% of the gross value exc. P&P – at the prevailing price at time of purchase). The customer must pay any and all carriage charges. No returns of discontinued products, unless within 14 days of purchase. This policy does not affect your statutory rights and does not refer to faulty goods.

Instructions de montage RAD0151BK Grille de protection radiateur

R&G Racing

Unit 1, Shelley's Lane, East Worldham, Alton, Hampshire, GU34 3AQ

Tel: +44 (0)1420 89007 Fax: +44 (0)1420 87301 www.rg-racing.com Email: info@rg-racing.com



BMW R1200GS 2013



Le kit doit contenir:

2 x Grille de protection radiateur (SRG0009 gauche et droite)
2x 100mm Mousse autocollante

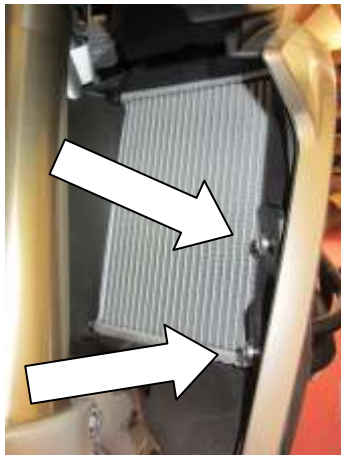


Photo 1

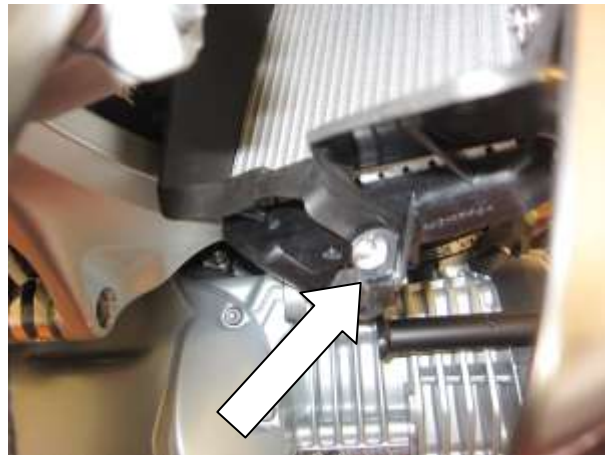


Photo 2



Photo 3



Photo 4



Photo 5



Photo 6



Photo 7



Outils requis

- Jeu de clés 4mm.

Instructions de montage :

Coté gauche assis sur la moto :

- Couper la mousse en bandeaux de 10mm puis collez ces bandeaux au bas du support de protection radiateur, de façon à ce que ces bandeaux se situent entre la protection radiateur et le radiateur.
- Enlever les 2 boulons qui fixent le coté du contour de radiateur en place au bas du carénage (Photo 1).
- Enlever le boulon qui fixe le bas du contour de radiateur en place (Photo 2).
- Prendre la grille de protection coté gauche. Elle peut être identifiée par la fente sur le coté gauche du cadre (Photo 3).
- Extraire délicatement le contour en plastique du bas du radiateur (il peut être enlevé pour plus de facilité, mais ce n'est pas obligatoire) et glisser derrière lui la grille de protection R&G (Photo 4).
- Positionner la grille de protection de façon à ce qu'elle couvre le radiateur entièrement, en vous assurant que les 2 languettes du haut soient sous le contour de radiateur en plastique (Photo 5).
- Remettre le contour de radiateur en plastique en place, parallèlement au radiateur. La languette en plastique du coté gauche doit se placer à travers la fente du coté de la grille de protection (Photo 6).
- Le trou de fixation inférieur sur le contour de radiateur en plastique doit à présent s'aligner avec le support radiateur, prenant en sandwich le trou de fixation de la grille de protection radiateur (Photo 7). Remettre le boulon d'origine.
- Assurez vous que la grille de protection soit correctement positionnée avant de remettre les 2 boulons d'origine sur le coté du contour de radiateur en plastique.
- Serrez tous les boulons de façon égale.

Pour installer la grille de protection du coté droit, suivre la même procédure.

ISSUE 1 15/05/2013 (AR)



Montageanleitung für den SRG0009 Kühlerschutz
BMW R1200GS 2013



Dieser Kit beinhaltet:
2x Kühlerschutz (SRG0009 – links & rechts)
2x 100mm selbstklebende Schaumstoffstreifen

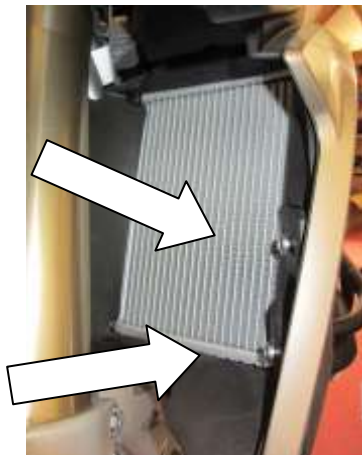


Abbildung 1

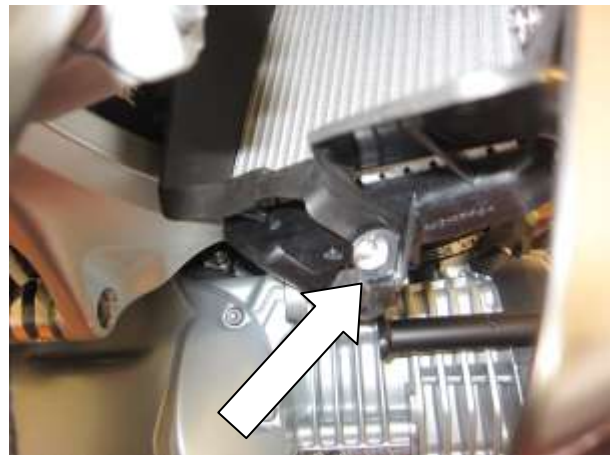


Abbildung 2



Abbildung 3



Abbildung 4



Abbildung 5



Abbildung 6



Abbildung 7



SIE BENÖTIGEN FOLGENDES WERKZEUG:

- Steckschlüssel-Satz inkl. 4mm Steckschlüssel

MONTAGEANLEITUNG

Linke Seite (in Fahrtrichtung)

- Um den Kühlerschutz am Motorrad zu montieren, schneiden Sie zuerst die mitgelieferten Schaumstoff-Streifen in 10 mm breite Streifen und kleben Sie diese auf der Rückseite des Kühlerschutzrahmens, so dass sie zwischen dem Kühlerschutz und dem Kühler angebracht sind.
- Entfernen Sie die zwei Schrauben, die die seitliche Plastikabdeckung des Kühlers an der Rückseite der Verkleidung befestigen, siehe Abbildung 1 (mit Pfeilen markiert).
- Entfernen Sie die Schraube, die die Plastikabdeckung für den Kühler unten befestigt – siehe Abbildung 2.
- Nehmen Sie den Kühlerschutz für die linke Seite (*den linken Kühlerschutz erkennen Sie an der Öffnung an der linken Seite des Rahmens, wie in Abbildung 3 gezeigt (Abbildung des R&G Aluminiumgitter-Kühlerschutzes)*).
- Die Plastikabdeckung unten am Kühler vorsichtig vom Kühler wegziehen (es ist nicht notwendig, sie zu entfernen) und den R&G Kühlerschutz dahinter schieben – siehe Abbildung 4.
- Positionieren Sie den Kühlerschutz, sodass der komplette Kühler abgedeckt ist – die beiden Laschen oben sind hierbei unter der Kühlerschutzabdeckung aus Plastik oben – siehe Abbildung 5.
- Die Plastikabdeckung wieder in Position bringen (parallel zum Kühler). Die Plastiklasche auf der linken Seite passt durch die Öffnung an der Seite des Kühlers – siehe Abbildung 6.
- Das untere Montageloch auf der Plastikabdeckung sollte jetzt bündig sein mit der Kühlerhalterung – das Montageloch des Kühlerschutzes liegt dazwischen – siehe Abbildung 7. Montieren Sie die Originalschraube wieder.
- Überprüfen Sie, dass der Plastikabdeckung richtig positioniert ist, bevor Sie die restlichen zwei Originalschrauben auf der anderen Seite der Kühlerabdeckung anbringen.
- Ziehen Sie alle Schraube gleichmäßig fest.

Wiederholen Sie die oben beschriebene Schritte, um den Kühlerschutz auf der rechten Seite des Motorrads zu montieren.

AUSGABE 1 15/05/2013 (AR)

CONSUMER NOTICE

The catalogue description and any exhibition of samples are only broad indications of the Products and R&G may make design changes which do not diminish their performance or visual appeal and supplying them in such state shall conform to the order. The Buyer acknowledges no representation or warranty (other than as to title) has been given or will apply to the Products other than those in R&G's order or confirmation and the Buyer confirms it has chosen the Products as being of merchantable quality and suitable for its particular purposes. Where R&G fits the Products or undertakes other services it shall exercise reasonable skill and care and rectify any fault free of charge unless the workmanship has been disturbed. The Buyer is responsible for ensuring that the warranty on the motorcycle is not affected by the fitting of the Products. On return of any defective Products R&G shall at its option either supply a replacement or refund the purchase money but shall not be liable if the Products have been modified or used or maintained otherwise than in accordance with R&G's or manufacturer's instructions and good engineering practice or if the defect arises from accident or neglect. Other than identified above and subject to R&G not limiting its liability for causing death and personal injury, it shall not be liable for indirect or consequential loss and otherwise its liability shall be limited to the amounts paid by the Buyer for the Products or the fitting or service concerned. These terms do not affect the Buyer's statutory rights.

R&G RACING RETURNS POLICY (NON-FAULTY GOODS)

Returns must be pre-authorized (if not pre-authorized the return will be rejected). Goods may only be returned direct to us if they were purchased direct from us (customer must prove if necessary). Otherwise to be returned to original vendor. Goods must be in re-sellable condition, in the opinion of R&G Racing. All returns are subject to a 25% restocking and handling fee (25% of the gross value exc. P&P – at the prevailing price at time of purchase). The customer must pay any and all carriage charges. No returns of discontinued products, unless within 14 days of purchase. This policy does not affect your statutory rights and does not refer to faulty goods.

R&G Racing

Unit 1, Shelley's Lane, East Worldham, Alton, Hampshire, GU34 3AQ

Tel: +44 (0)1420 89007 Fax: +44 (0)1420 87301 www.rg-racing.com Email: info@rg-racing.com



Montageanleitung für den SRG0009 Kühlerschutz
BMW R1200GS 2013



Dieser Kit beinhaltet:
2x Kühlerschutz (SRG0009 – links & rechts)
2x 100mm selbstklebende Schaumstoffstreifen

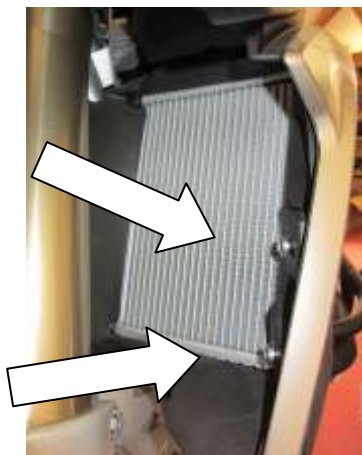


Abbildung 1

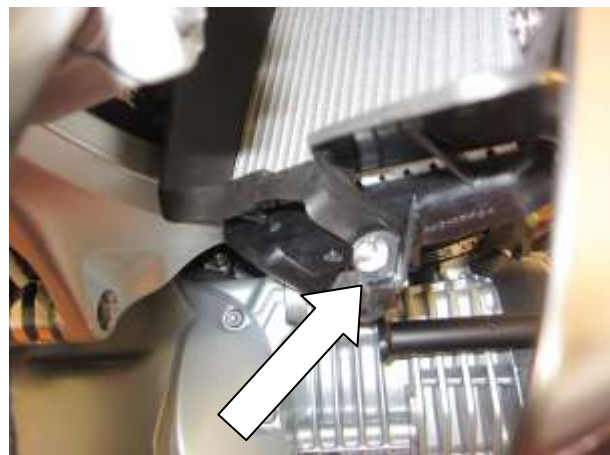


Abbildung 2



Abbildung 3



Abbildung 4



Abbildung 5



Abbildung 6



Abbildung 7



SIE BENÖTIGEN FOLGENDES WERKZEUG:

- Steckschlüssel-Satz inkl. 4mm Steckschlüssel

MONTAGEANLEITUNG

Linke Seite (in Fahrtrichtung)

- Um den Kühlerschutz am Motorrad zu montieren, schneiden Sie zuerst die mitgelieferten Schaumstoff-Streifen in 10 mm breite Streifen und kleben Sie diese auf der Rückseite des Kühlerschutzrahmens, so dass sie zwischen dem Kühlerschutz und dem Kühler angebracht sind.
- Entfernen Sie die zwei Schrauben, die die seitliche Plastikabdeckung des Kühlers an der Rückseite der Verkleidung befestigen, siehe Abbildung 1 (mit Pfeilen markiert).
- Entfernen Sie die Schraube, die die Plastikabdeckung für den Kühler unten befestigt – siehe Abbildung 2.
- Nehmen Sie den Kühlerschutz für die linke Seite (*den linken Kühlerschutz erkennen Sie an der Öffnung an der linken Seite des Rahmens, wie in Abbildung 3 gezeigt (Abbildung des R&G Aluminiumgitter-Kühlerschutzes)*).
- Die Plastikabdeckung unten am Kühler vorsichtig vom Kühler wegziehen (es ist nicht notwendig, sie zu entfernen) und den R&G Kühlerschutz dahinter schieben – siehe Abbildung 4.
- Positionieren Sie den Kühlerschutz, sodass der komplette Kühler abgedeckt ist – die beiden Laschen oben sind hierbei unter der Kühlerschutzabdeckung aus Plastik oben – siehe Abbildung 5.
- Die Plastik Kühlerabdeckung wieder in Position bringen (parallel zum Kühler). Die Plastiklasche auf der linken Seite passt durch die Öffnung an der Seite des Kühlers – siehe Abbildung 6.
- Das untere Montageloch auf der Plastikabdeckung sollte jetzt bündig sein mit der Kühlerhalterung – das Montageloch des Kühlerschutzes liegt dazwischen – siehe Abbildung 7. Montieren Sie die Originalschraube wieder.
- Überprüfen Sie, dass der Plastik Kühlerschutzabdeckung richtig positioniert ist, bevor Sie die restlichen zwei Originalschrauben auf der anderen Seite der Kühlerabdeckung anbringen.
- Ziehen Sie alle Schraube gleichmäßig fest.

Wiederholen Sie die oben beschriebene Schritte, um den Kühlerschutz auf der rechten Seite des Motorrads zu montieren.

AUSGABE 1 15/05/2013 (AR)

CONSUMER NOTICE

The catalogue description and any exhibition of samples are only broad indications of the Products and R&G may make design changes which do not diminish their performance or visual appeal and supplying them in such state shall conform to the order. The Buyer acknowledges no representation or warranty (other than as to title) has been given or will apply to the Products other than those in R&G's order or confirmation and the Buyer confirms it has chosen the Products as being of merchantable quality and suitable for its particular purposes. Where R&G fits the Products or undertakes other services it shall exercise reasonable skill and care and rectify any fault free of charge unless the workmanship has been disturbed. The Buyer is responsible for ensuring that the warranty on the motorcycle is not affected by the fitting of the Products. On return of any defective Products R&G shall at its option either supply a replacement or refund the purchase money but shall not be liable if the Products have been modified or used or maintained otherwise than in accordance with R&G's or manufacturer's instructions and good engineering practice or if the defect arises from accident or neglect. Other than identified above and subject to R&G not limiting its liability for causing death and personal injury, it shall not be liable for indirect or consequential loss and otherwise its liability shall be limited to the amounts paid by the Buyer for the Products or the fitting or service concerned. These terms do not affect the Buyer's statutory rights.

R&G RACING RETURNS POLICY (NON-FAULTY GOODS)

Returns must be pre-authorized (if not pre-authorized the return will be rejected). Goods may only be returned direct to us if they were purchased direct from us (customer must prove if necessary). Otherwise to be returned to original vendor. Goods must be in re-sellable condition, in the opinion of R&G Racing. All returns are subject to a 25% restocking and handling fee (25% of the gross value exc. P&P – at the prevailing price at time of purchase). The customer must pay any and all carriage charges. No returns of discontinued products, unless within 14 days of purchase. This policy does not affect your statutory rights and does not refer to faulty goods.

R&G Racing

Unit 1, Shelley's Lane, East Worldham, Alton, Hampshire, GU34 3AQ

Tel: +44 (0)1420 89007 Fax: +44 (0)1420 87301 www.rg-racing.com Email: info@rg-racing.com