



FITTING INSTRUCTIONS FOR PKS0189 KICKSTAND SHOE



THIS KIT CONTAINS THE ITEMS PICTURED AND LABELLED OVER PAGE.

SOME PARTS MAY BE SHOWN FOR CLARITY OF INSTRUCTIONS ONLY.

DO NOT PROCEED UNTIL YOU ARE SURE ALL PARTS ARE PRESENT.

PLEASE READ ALL INSTRUCTIONS BEFORE PROCEEDING.

**IF IN ANY DOUBT WHEN FITTING OUR PRODUCTS, CONSULT ONE OF OUR DEALERS
OR HAVE FITTED BY A QUALIFIED TECHNICIAN.**

Please note that the way the kit is packed does not necessarily represent the way of mounting to the bike.


In the event of rubber washers being used to hold components onto bolts, these rubber washers can be thrown away.

<u>TOOLS REQUIRED</u> • 3mm A/F Allen key or bit. • Thread locking compound.	<u>GENERAL TORQUE SETTINGS</u> • M4 BOLT = 8Nm • M5 BOLT = 12Nm • M6 BOLT = 15Nm • M8 BOLT = 20Nm • M10 BOLT = 40Nm • M12 BOLT = 40Nm
--	---

LEGEND

ITEM No.	DESCRIPTION	QTY
ITEM 1	MOUNTING PLATE (MP0300)	1
ITEM 2	CLAMP PLATE (PLATE0325)	1
ITEM 3	CLAMP PLATE (PLATE0327)	1
ITEM 4	M5x8mm LONG STAINLESS-STEEL COUNTERSUNK BOLTS	4
ITEM 5	50mm STRIP OF SELF-ADHESIVE FOAM	1

EXPLODED DIAGRAM

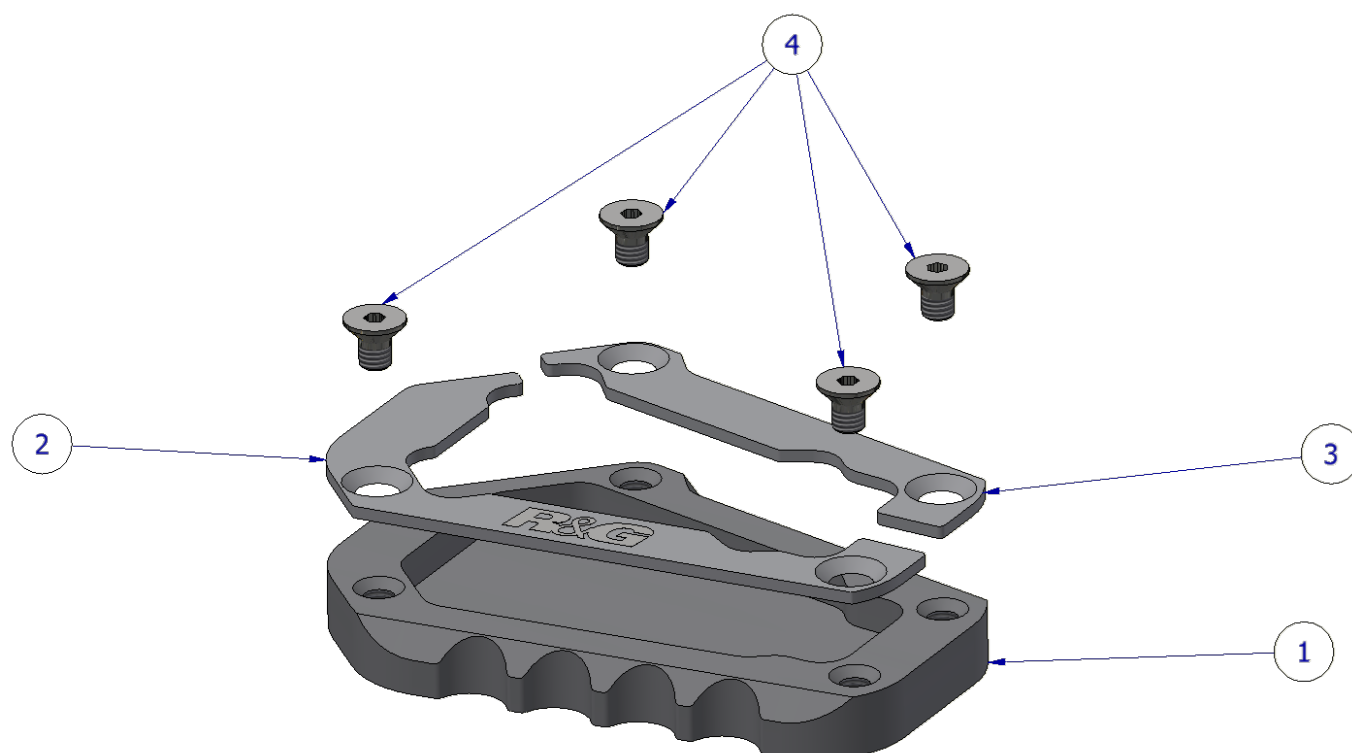

Racing Technique Ltd T/A R&G

Unit 1, Shelley's Lane, East Worldham, Alton, Hampshire, GU34 3AQ

Tel: +44 (0)1420 89007 Fax: +44 (0)1420 87301 www.rg-racing.com Email: info@rg-racing.com

FITTING INSTRUCTIONS

1. Carefully slot the LARGER stainless-steel clamp plate (**ITEM 2**) around the side stand using the cutout, ensure the countersinks facing upwards as shown in the Assembly Diagram.
2. Take the machined aluminium mounting plate (**ITEM 1**) and fit to the base of the side stand from underneath.
3. Sandwich the two plates together around the side stand foot.
4. Apply a small amount of (one drop) of thread locking compound to the threaded end of each countersunk bolt (**ITEM 4**).
5. Fit 2 bolts (**ITEM 4**) through the clamp plate and into the mounting plate, clamping the two plates securely together to the side stand foot as shown in the assembly diagram.
6. Carefully slot the SMALLER stainless-steel clamp plate (**ITEM 3**) around the side stand using the cutout, ensure the countersinks facing upwards as shown in the Assembly Diagram.
7. Sandwich the two plates together around the side stand foot.
8. Apply a small amount of (one drop) of thread locking compound to the threaded end of each countersunk bolt (**ITEM 4**).
9. Fit the remaining 2 bolts (**ITEM 3**) through the clamp plate and into the mounting plate, clamping the two plates securely together to the side stand foot as shown in the assembly diagram.
10. Tighten all the bolts evenly and ensure the stand is clear of the swingarm and chain when in the raised position. If fitting to older used stands that have wear, the self-adhesive foam strip (**ITEM 5**) should be cut and placed into the base plate to ensure a tight fit.

ISSUE 2 - 06/08/2025 (MH)

CONSUMER NOTICE

The catalogue description and any exhibition of samples are only broad indications of the Products and R&G may make design changes which do not diminish their performance or visual appeal and supplying them in such state shall conform to the order. The Buyer acknowledges no representation or warranty (other than as to title) has been given or will apply to the Products other than those in R&G's order or confirmation and the Buyer confirms it has chosen the Products as being of merchantable quality and suitable for its particular purposes. Where R&G fits the Products or undertakes other services it shall exercise reasonable skill and care and rectify any fault free of charge unless the workmanship has been disturbed. The Buyer is responsible for ensuring that the warranty on the motorcycle is not affected by the fitting of the Products. On return of any defective Products R&G shall at its option either supply a replacement or refund the purchase money but shall not be liable if the Products have been modified or used or maintained otherwise than in accordance with R&G's or manufacturer's instructions and good engineering practice or if the defect arises from accident or neglect. Other than identified above and subject to R&G not limiting its liability for causing death and personal injury, it shall not be liable for indirect or consequential loss and otherwise its liability shall be limited to the amounts paid by the Buyer for the Products or the fitting or service concerned. These terms do not affect the Buyer's statutory rights.

R&G RACING RETURNS POLICY (NON-FAULTY GOODS)

Returns must be pre-authorised (if not pre-authorised the return will be rejected). Goods may only be returned direct to us if they were purchased direct from us (customer must prove if necessary). Otherwise to be returned to original vendor. Goods must be in re-sellable condition, in the opinion of R&G Racing. All returns are subject to a 25% restocking and handling fee (25% of the gross value exc. P&P – at the prevailing price at time of purchase). The customer must pay any and all carriage charges. No returns of discontinued products, unless within 14 days of purchase. This policy does not affect your statutory rights and does not refer to faulty goods.

Racing Technique Ltd T/A R&G

Unit 1, Shelley's Lane, East Worldham, Alton, Hampshire, GU34 3AQ

Tel: +44 (0)1420 89007 Fax: +44 (0)1420 87301 www.rg-racing.com Email: info@rg-racing.com



NOTICE DE MONTAGE POUR PKS0189 PIED DE BÉQUILLE



CE KIT CONTIENT LES ARTICLES ILLUSTRÉS ET ÉTIQUETÉS SUR LA PAGE.

CERTAINES PIÈCES PEUVENT ÊTRE INDIQUÉES UNIQUEMENT POUR LA CLARTÉ DES INSTRUCTIONS.

NE PAS CONTINUER AVANT D'ÊTRE SÛR DE LA PRÉSENCE DE TOUTES LES PIÈCES.

VEUILLEZ LIRE TOUTES LES INSTRUCTIONS AVANT DE CONTINUER.

EN CAS DE DOUTE LORS DE L'INSTALLATION DE NOS PRODUITS, CONSULTEZ UN DE NOS REVENDEURS OU FAITES INSTALLER PAR UN TECHNICIEN QUALIFIÉ.

VEUILLEZ NOTER QUE LA FAÇON DONT LE KIT EST EMBALLÉ NE REPRÉSENTE PAS
NÉCESSAIREMENT LE MODE DE MONTAGE SUR LA MOTO.

EN CAS D'UTILISATION DE RONDELLES EN CAOUTCHOUC POUR MAINTENIR LES COMPOSANTS
SUR LES BOULONS, CES RONDELLES EN CAOUTCHOUC PEUVENT ÊTRE JETÉES.

Racing Technique Ltd T/A R&G

Unit 1, Shelley's Lane, East Worldham, Alton, Hampshire, GU34 3AQ

Tel: +44 (0)1420 89007 Fax: +44 (0)1420 87301 www.rg-racing.com Email: info@rg-racing.com




<u>OUTILS REQUIS</u>	<u>VALEURS DE SERRAGE</u>
• Clé Allen 3mm • Frein filet	BOULON M4 = 8Nm BOULON M5 = 12Nm BOULON M6 = 15Nm BOULON M8 = 20Nm BOULON M10 = 40Nm BOULON M12 = 40Nm

LÉGENDE

ARTICLE No.	DESCRIPTION	QTÉ
ARTICLE 1	PLAQUE DE MONTAGE (MP0300)	1
ARTICLE 2	PLAQUE DE SERRAGE (PLATE0325)	1
ARTICLE 3	PLAQUE DE SERRAGE (PLATE0327)	1
ARTICLE 4	M5x8mm BOULONS	4
ARTICLE 5	50mm BANDEAU DE MOUSSE ADHÉSIF	1

SCHÉMA D'ENSEMBLE

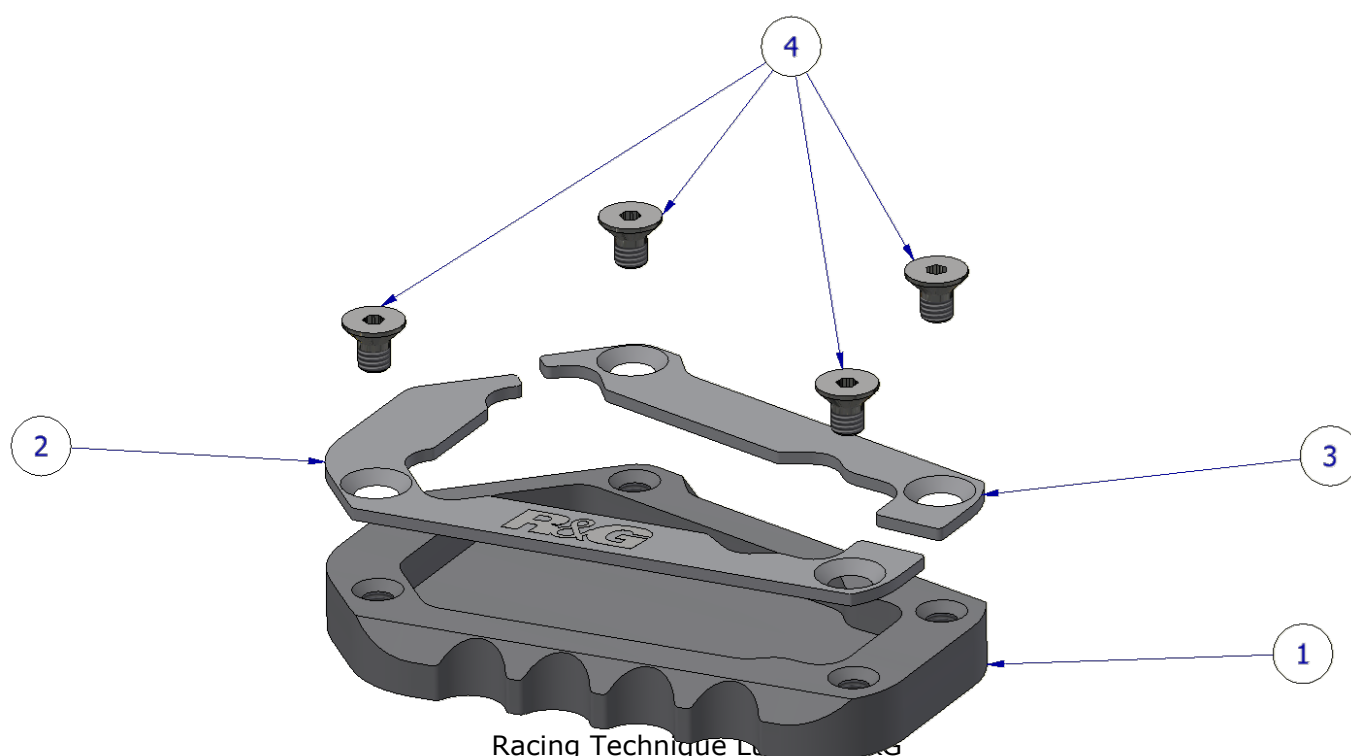

Racing Technique Ltd

Unit 1, Shelley's Lane, East Worldham, Alton, Hampshire, GU34 3AQ

Tel: +44 (0)1420 89007 Fax: +44 (0)1420 87301 www.rg-racing.com Email: info@rg-racing.com



NOTICE DE MONTAGE

11. Insérez soigneusement la GRANDE plaque de fixation en acier inoxydable (ARTICLE 2) autour de la béquille latérale en utilisant la découpe. Assurez-vous que les fraises soient orientées vers le haut, comme indiqué sur le schéma de montage.
12. Prenez la plaque de montage en aluminium usinée (ARTICLE 1) et fixez-la à la base de la béquille latérale par le dessous.
13. Assemblez les deux plaques autour du pied de la béquille latérale.
14. Appliquez une petite quantité (une goutte) de frein-filet sur l'extrémité filetée de chaque boulon à tête fraisée (ARTICLE 4).
15. Insérez deux boulons (ARTICLE 4) à travers la plaque de fixation et dans la plaque de montage, en serrant solidement les deux plaques ensemble sur le pied de la béquille latérale, comme indiqué sur le schéma de montage.
16. Insérez soigneusement la PETITE plaque de fixation en acier inoxydable (ARTICLE 3) autour de la béquille latérale en utilisant la découpe. Assurez-vous que les fraises soient orientées vers le haut, comme indiqué sur le schéma de montage.
17. Assemblez les deux plaques autour du pied de la béquille latérale.
18. Appliquez une petite quantité (une goutte) de frein-filet sur l'extrémité filetée de chaque boulon à tête fraisée (ARTICLE 4).
19. Insérez les deux boulons restants (ARTICLE 3) dans la plaque de fixation, puis fixez-les solidement au pied de la béquille latérale, comme indiqué sur le schéma de montage.
20. Serrez tous les boulons uniformément et assurez-vous que la béquille soit bien dégagée du bras oscillant et de la chaîne en position relevée. Pour le montage sur des béquilles anciennes et usées, découpez la bande de mousse autocollante (ARTICLE 5) et insérez-la dans la plaque de base pour garantir un ajustement parfait.

ISSUE 2 - 06/08/2025 (MH)

CONSUMER NOTICE

The catalogue description and any exhibition of samples are only broad indications of the Products and R&G may make design changes which do not diminish their performance or visual appeal and supplying them in such state shall conform to the order. The Buyer acknowledges no representation or warranty (other than as to title) has been given or will apply to the Products other than those in R&G's order or confirmation and the Buyer confirms it has chosen the Products as being of merchantable quality and suitable for its particular purposes. Where R&G fits the Products or undertakes other services it shall exercise reasonable skill and care and rectify any fault free of charge unless the workmanship has been disturbed. The Buyer is responsible for ensuring that the warranty on the motorcycle is not affected by the fitting of the Products. On return of any defective Products R&G shall at its option either supply a replacement or refund the purchase money but shall not be liable if the Products have been modified or used or maintained otherwise than in accordance with R&G's or manufacturer's instructions and good engineering practice or if the defect arises from accident or neglect. Other than identified above and subject to R&G not limiting its liability for causing death and personal injury, it shall not be liable for indirect or consequential loss and otherwise its liability shall be limited to the amounts paid by the Buyer for the Products or the fitting or service concerned. These terms do not affect the Buyer's statutory rights.

R&G RACING RETURNS POLICY (NON-FAULTY GOODS)

Returns must be pre-authorised (if not pre-authorised the return will be rejected). Goods may only be returned direct to us if they were purchased direct from us (customer must prove if necessary). Otherwise to be returned to original vendor. Goods must be in re-sellable condition, in the opinion of R&G Racing. All returns are subject to a 25% restocking and handling fee (25% of the gross value exc. P&P – at the prevailing price at time of purchase). The customer must pay any and all carriage charges. No returns of discontinued products, unless within 14 days of purchase. This policy does not affect your statutory rights and does not refer to faulty goods.

Racing Technique Ltd T/A R&G

Unit 1, Shelley's Lane, East Worldham, Alton, Hampshire, GU34 3AQ

Tel: +44 (0)1420 89007 Fax: +44 (0)1420 87301 www.rg-racing.com Email: info@rg-racing.com