




**FITTING INSTRUCTIONS FOR RAD0261 RADIATOR GUARD
FOR TRIUMPH MOTO2 765 2020-**

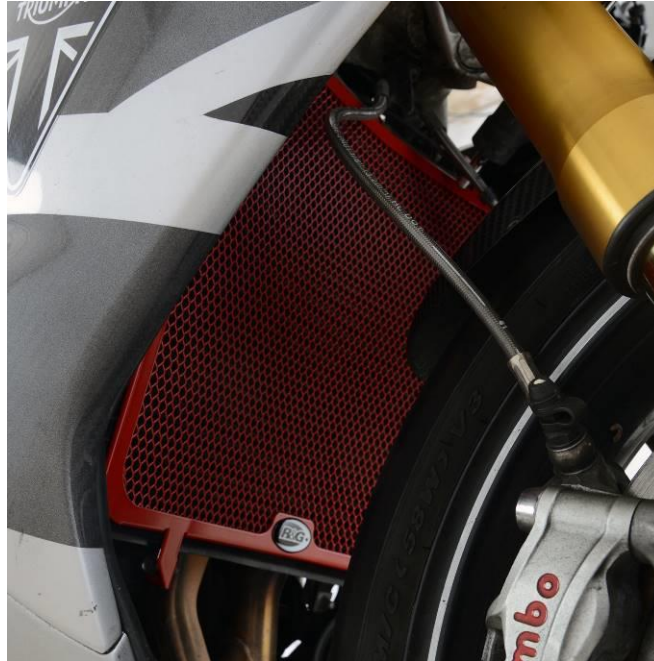

PICTURE A

THIS KIT CONTAINS THE ITEMS PICTURED AND LABELLED OVER PAGE.

SOME PARTS MAY BE SHOWN FOR CLARITY OF INSTRUCTIONS ONLY.

DO NOT PROCEED UNTIL YOU ARE SURE ALL PARTS ARE PRESENT.

PLEASE READ ALL INSTRUCTIONS BEFORE PROCEEDING.

**IF IN ANY DOUBT WHEN FITTING OUR PRODUCTS, CONSULT ONE OF
OUR DEALERS OR HAVE FITTED BY A QUALIFIED TECHNICIAN.**

PLEASE NOTE THAT THE WAY THE KIT IS PACKED DOES NOT NECESSARILY REPRESENT THE
WAY OF MOUNTING TO THE BIKE.


IN THE EVENT OF RUBBER WASHERS BEING USED TO HOLD COMPONENTS ONTO BOLTS,
THESE RUBBER WASHERS CAN BE THROWN AWAY.

DIGITAL COPIES OF THESE INSTRUCTIONS ARE AVAILABLE FROM:

WWW.RG-RACING.COM



<u>TOOLS REQUIRED</u>	<u>GENERAL TORQUE SETTINGS</u>
<ul style="list-style-type: none"> • Metric Allen key set. • Metric socket set. • Phillips and flat bladed driver. <ul style="list-style-type: none"> • Cable cutters. 	<p>M4 BOLT = 8Nm M5 BOLT = 12Nm M6 BOLT = 15Nm M8 BOLT = 20Nm M10 BOLT = 40Nm M12 BOLT = 40Nm</p>

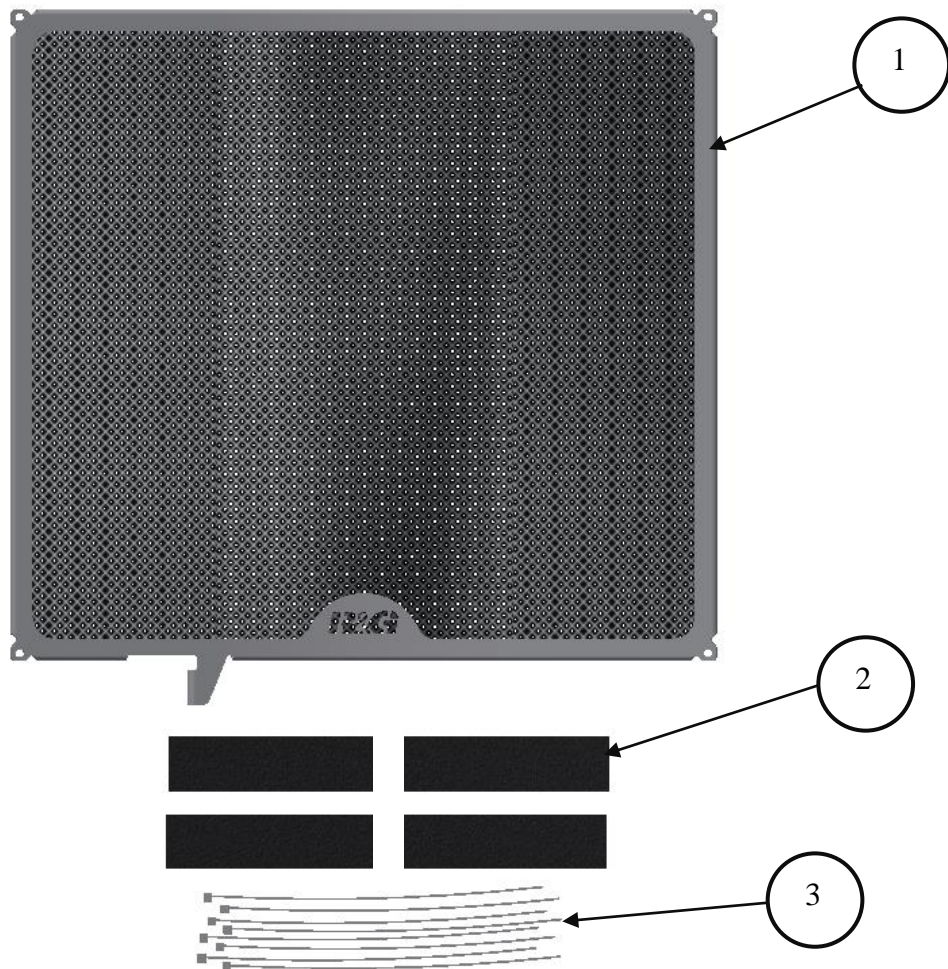


COMPONENT DIAGRAM




LEGEND

ITEM NO.	DESCRIPTION	QTY
ITEM 1	RADIATOR GUARD (RAD0261)	1
ITEM 2	SELF ADHESIVE FOAM x 100mm LONG	4
ITEM 3	2.5mm CABLE TIES	8

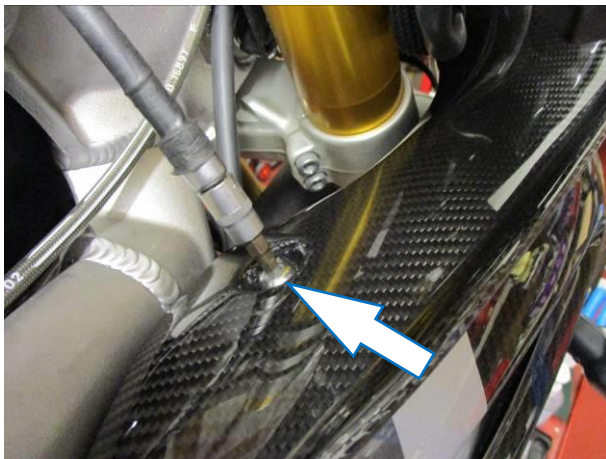

PICTURE 1

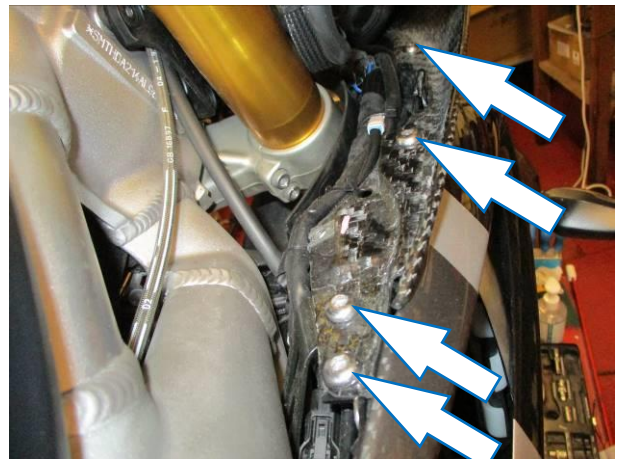

PICTURE 2




PICTURE 3




PICTURE 4



PICTURE 5

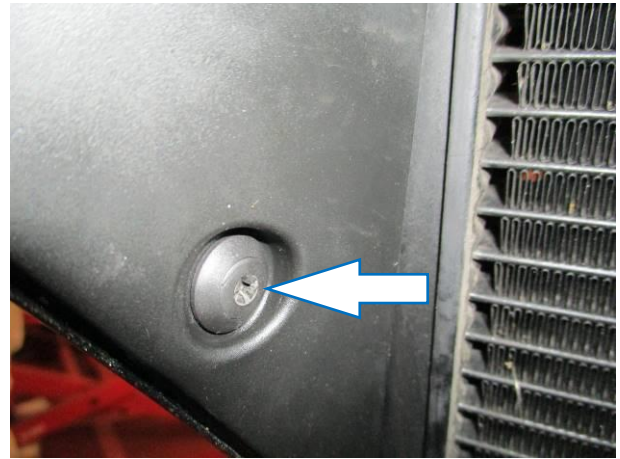


PICTURE 6

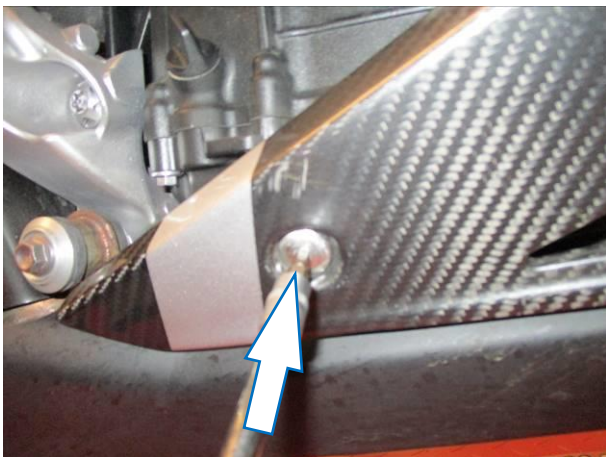


PICTURE 7




PICTURE 8

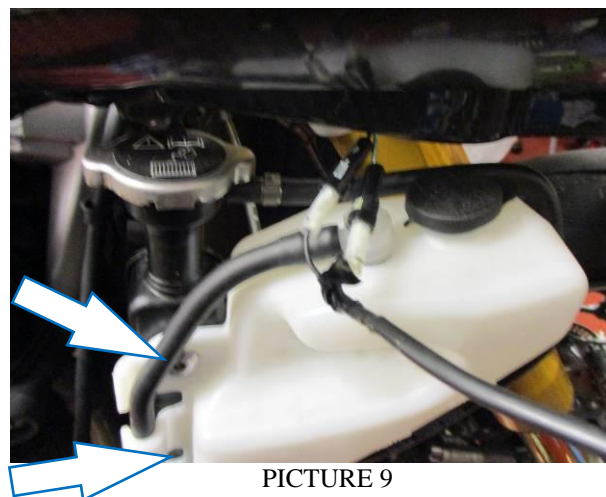


PICTURE 9

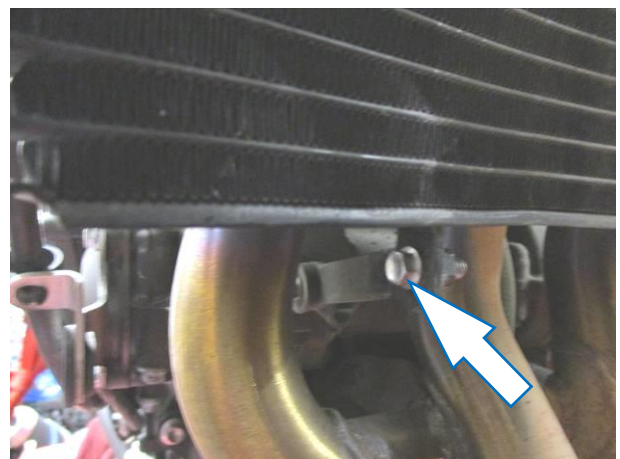


PICTURE 10

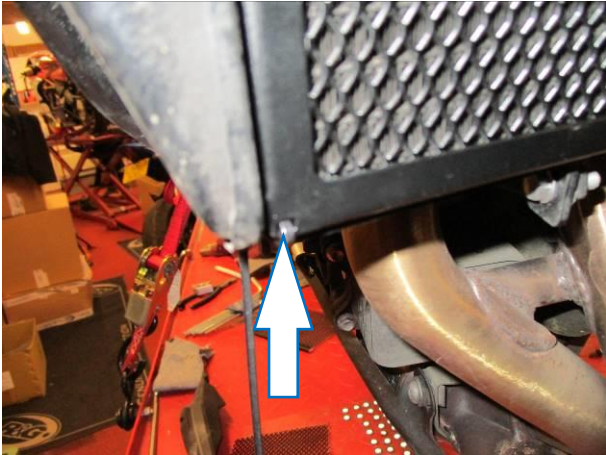


PICTURE 11

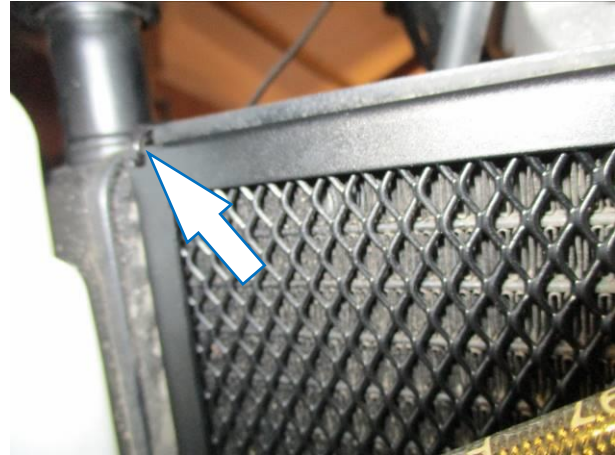

PICTURE 12

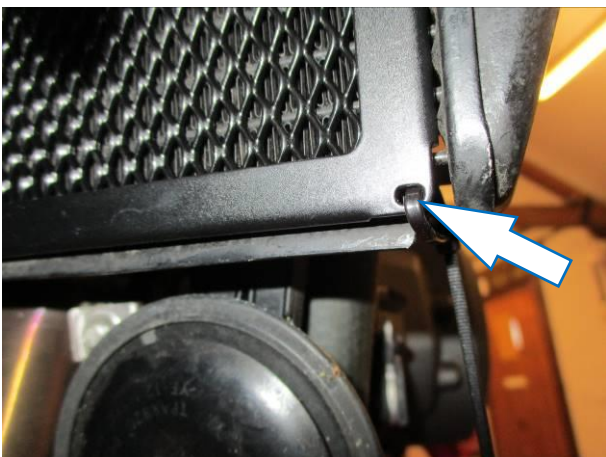

PICTURE 13

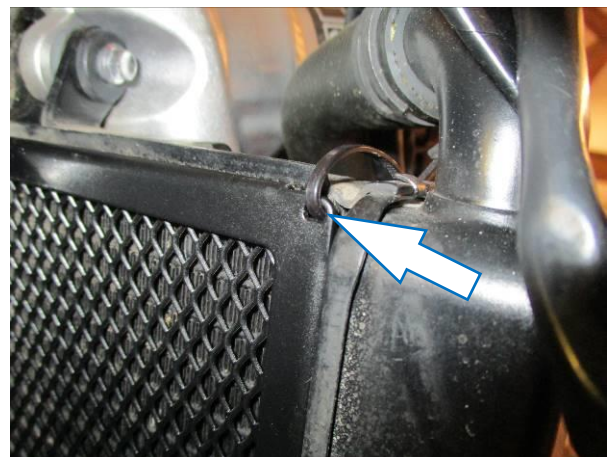

PICTURE 14

FITTING INSTRUCTIONS

Off side (right side as you sit on the motorcycle)

- Remove the bolt arrowed in **picture 1** and remove the inner infill panel.
- Remove the four bolts arrowed in **picture 2**.
- Remove the two bolts arrowed in **picture 3**.
- Remove the four-plastic quarter-turn rivets arrowed in **pictures 4, 5 and 6**.
- Remove the two bolts arrowed in **pictures 7 and 8**.
- Carefully remove the fairing.

Near side (left side as you sit on the motorcycle)

- Repeat the above for the opposite infill panel and fairing.

Off side (right side as you sit on the motorcycle)


- Remove the two bolts arrowed in **picture 9** and move the coolant filler bottle for access only do not fully remove.
- Remove the bolt arrowed in **picture 10**.

R&G

Unit 1, Shelley's Lane, East Worldham, Alton, Hampshire, GU34 3AQ
 Tel: +44 (0)1420 89007 Fax: +44 (0)1420 87301 www.rg-racing.com Email: info@rg-racing.com



- To fit the radiator guard to the bike, first cut the self-adhesive foam strip provided (**item 2**) into 10mm wide pieces and stick them to the back of the radiator guard frame (**item 1**), so that they will sit between the radiator guard and the radiator as shown in **below**.

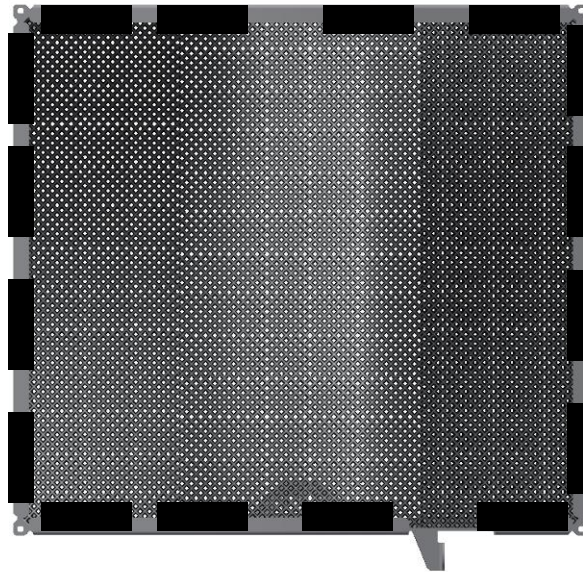

- Offer the radiator guard into position and secure in position using the original bolt on the lower mounting bracket.
- Use the supplied cable ties (**item 3**) to secure the guard into position ensuring to pass the cable ties around the upper radiator mounts through the radiator frame and not the cooling matrix as shown in **pictures 11, 12, 13 and 14**.
- Refit the coolant filler bottle as original.
- Refit both fairings as original.
- Refit both infill panels as original.

ISSUE 1 27/05/2021 (NSY)

CONSUMER NOTICE

The catalogue description and any exhibition of samples are only broad indications of the Products and R&G may make design changes which do not diminish their performance or visual appeal and supplying them in such state shall conform to the order. The Buyer acknowledges no representation or warranty (other than as to title) has been given or will apply to the Products other than those in R&G's order or confirmation and the Buyer confirms it has chosen the Products as being of merchantable quality and suitable for its particular purposes. Where R&G fits the Products or undertakes other services it shall exercise reasonable skill and care and rectify any fault free of charge unless the workmanship has been disturbed. The Buyer is responsible for ensuring that the warranty on the motorcycle is not affected by the fitting of the Products. On return of any defective Products R&G shall at its option either supply a replacement or refund the purchase money but shall not be liable if the Products have been modified or used or maintained otherwise than in accordance with R&G's or manufacturer's instructions and good engineering practice or if the defect arises from accident or neglect. Other than identified above and subject to R&G not limiting its liability for causing death and personal injury, it shall not be liable for indirect or consequential loss and otherwise its liability shall be limited to the amounts paid by the Buyer for the Products or the fitting or service concerned. These terms do not affect the Buyer's statutory rights.

R&G

Unit 1, Shelley's Lane, East Worldham, Alton, Hampshire, GU34 3AQ
Tel: +44 (0)1420 89007 Fax: +44 (0)1420 87301 www.rg-racing.com Email: info@rg-racing.com



R&G RETURNS POLICY (NON-FAULTY GOODS)

Returns must be pre-authorized (if not pre-authorized the return will be rejected). Goods may only be returned direct to us if they were purchased direct from us (customer must prove if necessary). Otherwise to be returned to original vendor. Goods must be in re-sellable condition, in the opinion of R&G. All returns are subject to a 25% restocking and handling fee (25% of the gross value exc. P&P – at the prevailing price at time of purchase). The customer must pay any and all carriage charges. No returns of discontinued products, unless within 14 days of purchase. This policy does not affect your statutory rights and does not refer to faulty goods.



**NOTICE DE MONTAGE POUR RAD0261 PROTECTION RADIATEUR
POUR TRIUMPH MOTO2 765 2020-**

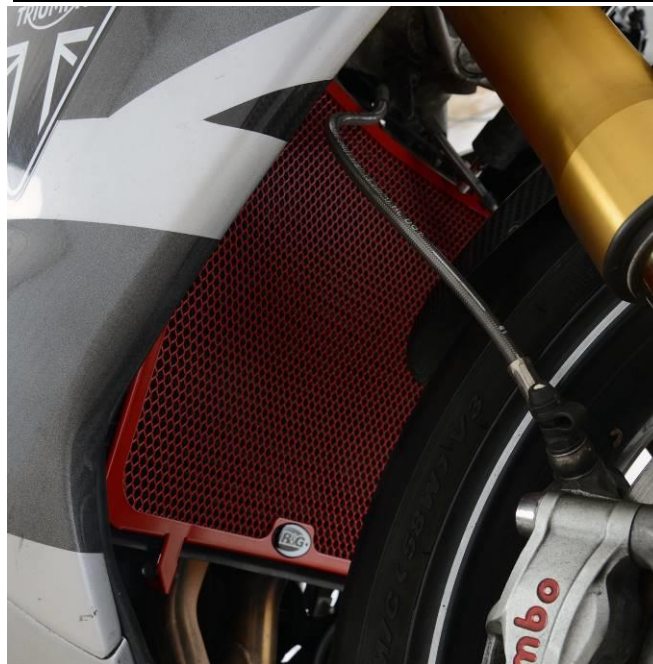


PHOTO A

CE KIT CONTIENT LES ARTICLES ILLUSTRES ET ETIQUETES SUR LA PAGE.

CERTAINES PARTIES PEUVENT ETRE PRESENTES UNIQUEMENT POUR LA CLARTE DES
INSTRUCTIONS.

NE PAS PROCEDER AU MONTAGE TANT QUE VOUS N'ETES PAS SUR QUE TOUTES LES PIECES
SOIENT PRESENTES.

VEUILLEZ LIRE TOUTES LES INSTRUCTIONS AVANT DE CONTINUER.

**EN CAS DE DOUTE LORS DU MONTAGE DE NOS PRODUITS, CONSULTEZ
UN DE NOS REVENDEURS OU FAITES APPEL A UN TECHNICIEN
QUALIFIÉ.**


VEUILLEZ NOTER QUE LA FAÇON DONT LE KIT EST EMBALLE NE REPRESENTE PAS
NECESSAIREMENT LA MANIERE DE LE MONTER SUR LA MOTO.

SI DES RONDELLES EN CAOUTCHOUC SONT UTILISEES POUR MAINTENIR LES COMPOSANTS
SUR LES BOULONS, ELLES PEUVENT ETRE JETEES.

NOTICE DISPONIBLE AU TELECHARGEMENT SUR : WWW.RG-RACING.COM



<u>OUTILS REQUIS</u>	<u>VALEURS DE SERRAGE</u>
<ul style="list-style-type: none"> • Clé Allen. • Clé métrique. • Tournevis cruciforme et plat. • Pince coupante. 	<p>M4 BOULON = 8Nm M5 BOULON = 12Nm M6 BOULON = 15Nm M8 BOULON = 20Nm M10 BOULON = 40Nm M12 BOULON = 40Nm</p>

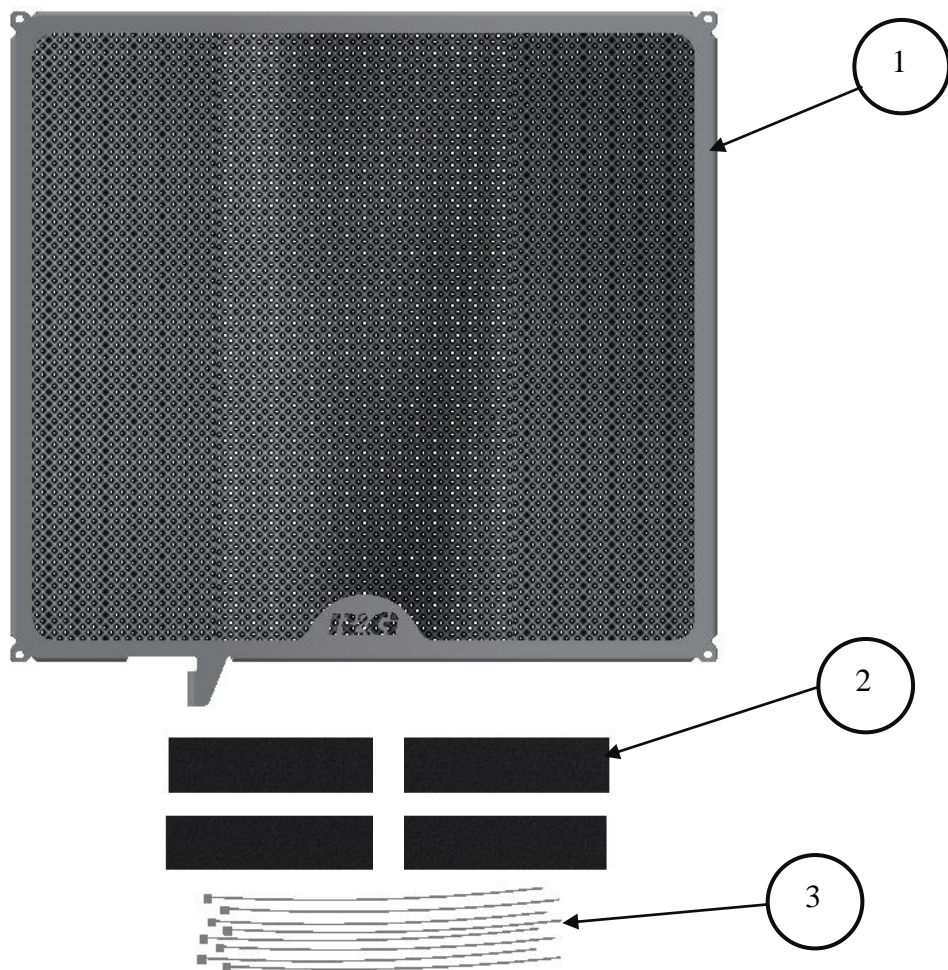

SCHÉMA

R&G



LÉGENDE

ARTICLE NO.	DESCRIPTION	QTÉ
ARTICLE 1	PROTECTION RADIATEUR (RAD0261)	1
ARTICLE 2	MOUSSE AUTOCOLLANTE x 100mm DE LONG	4
ARTICLE 3	2.5mm COLLIERS DE SERRAGE	8



PHOTO 1

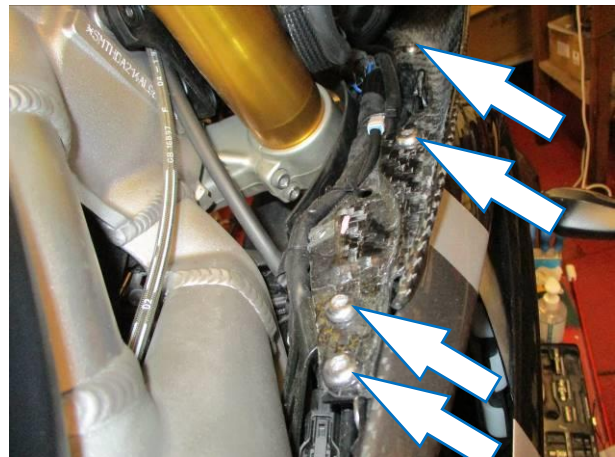


PHOTO 2

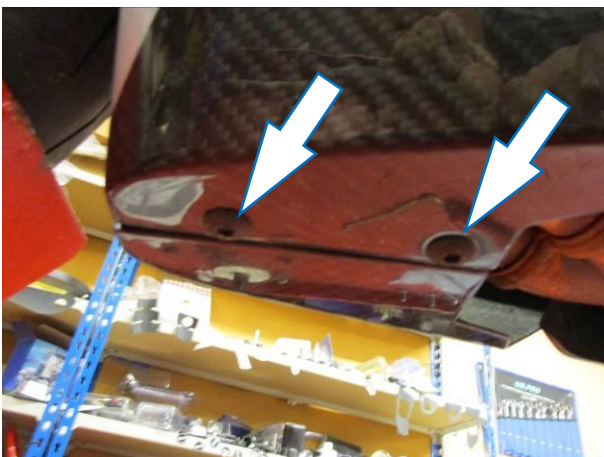


PHOTO 3



PHOTO 4

R&G

Unit 1, Shelley's Lane, East Worldham, Alton, Hampshire, GU34 3AQ
 Tel: +44 (0)1420 89007 Fax: +44 (0)1420 87301 www.rg-racing.com Email: info@rg-racing.com



PHOTO 5

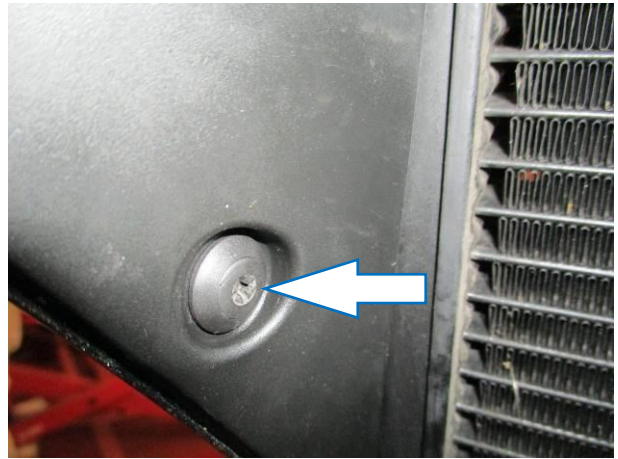


PHOTO 6

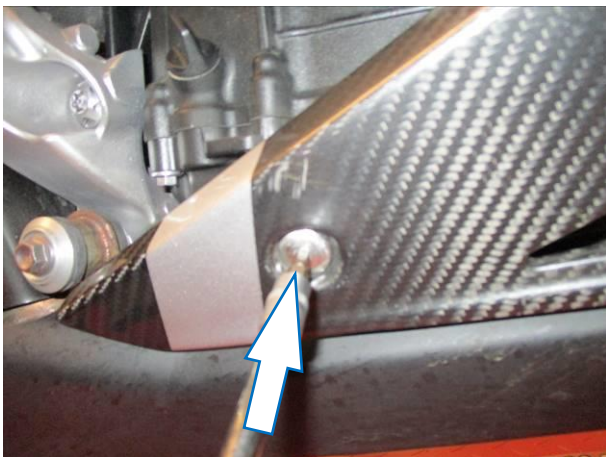


PHOTO 7



PHOTO 8

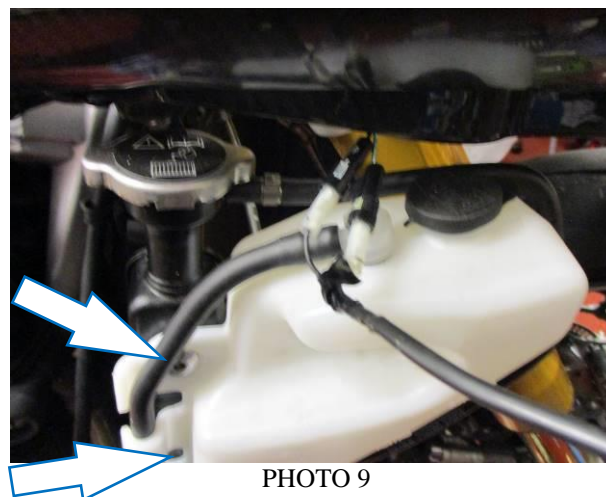


PHOTO 9

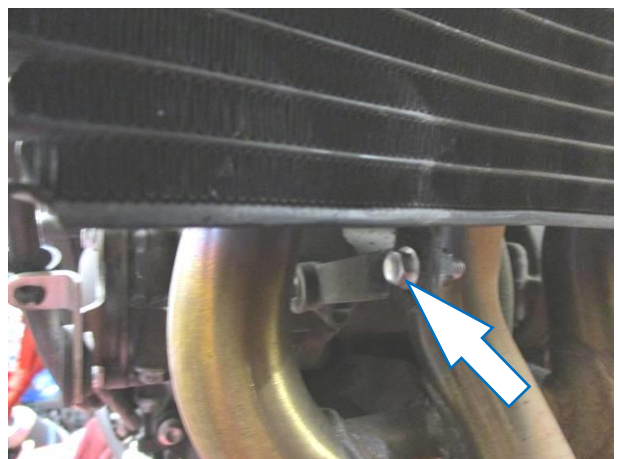


PHOTO 10

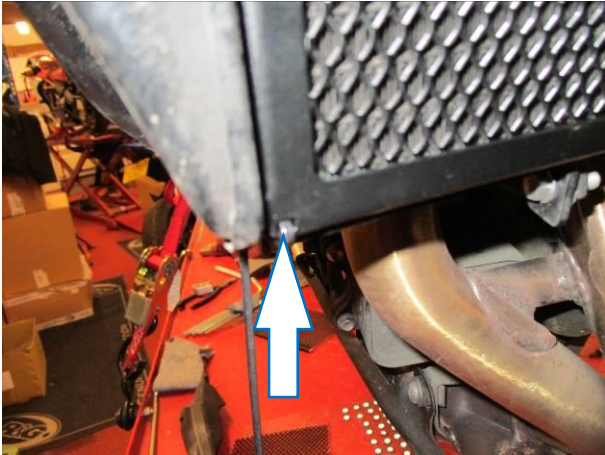


PHOTO 11

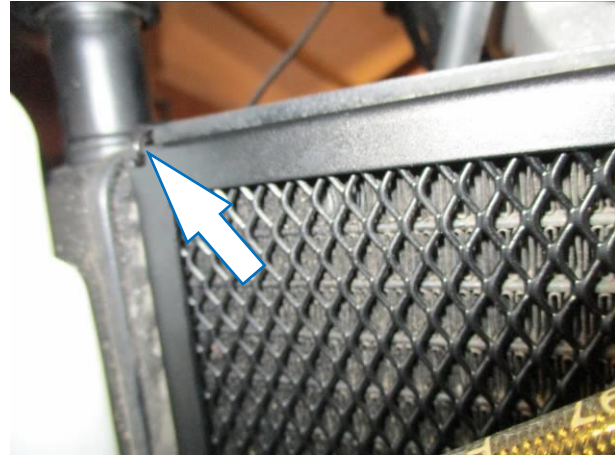


PHOTO 12

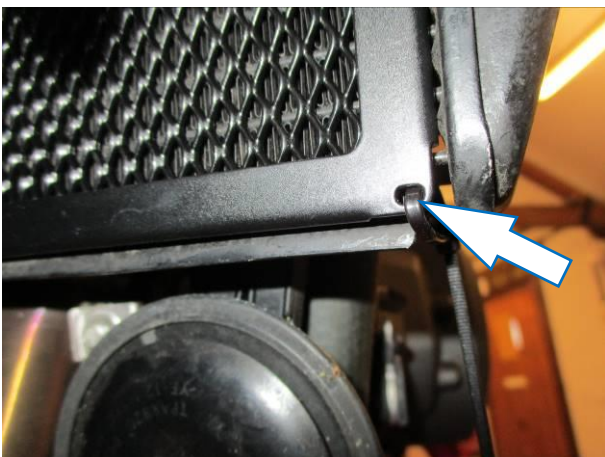


PHOTO 13

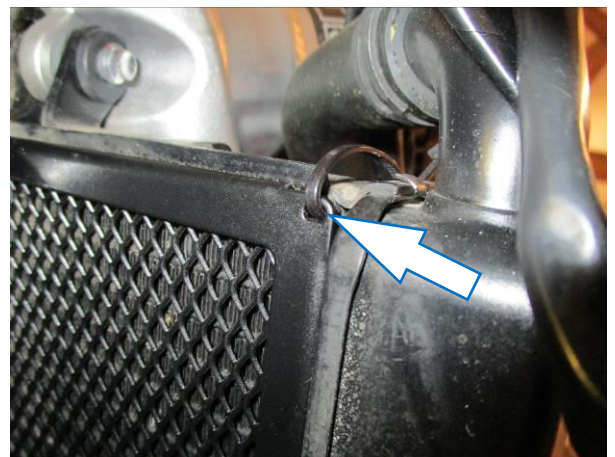


PHOTO 14

NOTICE DE MONTAGE

Côté droit (lorsqu'on est assis sur la moto)

- Retirez le boulon marqué d'une flèche sur la photo 1 et retirez le panneau de remplissage intérieur.
- Retirez les quatre boulons indiqués sur la photo 2.
- Retirez les deux boulons indiqués sur la photo 3.
- Retirez les quatre rivets quart de tour en plastique fléchés sur les photos 4, 5 et 6.
- Retirez les deux boulons indiqués par une flèche sur les photos 7 et 8.
- Retirez soigneusement le carénage.


Côté gauche (lorsqu'on est assis sur la moto)

- Répétez la procédure ci-dessus pour le panneau de remplissage et le carénage opposés.

Côté droit (lorsqu'on est assis sur la moto)



- Retirez les deux boulons fléchés sur la photo 9 et déplacez la bouteille de remplissage de liquide de refroidissement pour y accéder uniquement.
- Retirez le boulon indiqué sur la photo 10.
- Pour installer la protection radiateur sur la moto, coupez d'abord la bande de mousse autocollante fournie (article 2) en morceaux de 10 mm de large et collez-les à l'arrière du cadre de protection de radiateur (article 1), de manière à ce qu'ils reposent entre la protection radiateur et le radiateur comme indiqué ci-dessous.

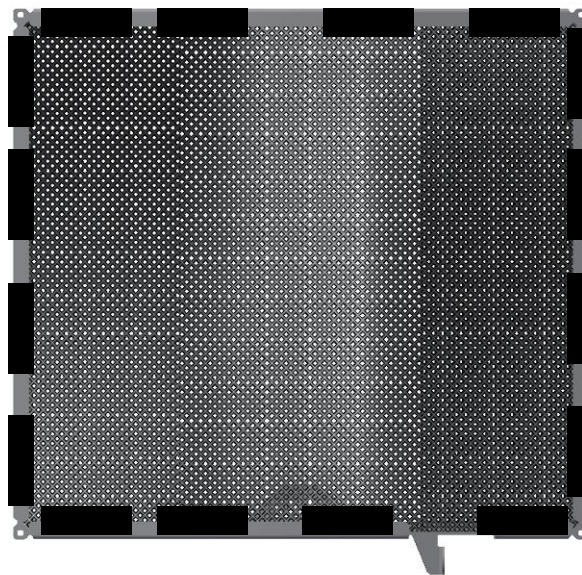

- Offrez la protection du radiateur en place et fixez-la en position à l'aide du boulon d'origine sur le support de montage inférieur.
- Utilisez les serre-câbles fournis (article 3) pour fixer la protection en position en veillant à faire passer les serre-câbles autour des supports de radiateur supérieurs à travers le cadre de radiateur et non-la matrice de refroidissement comme indiqué sur les photos 11, 12, 13 et 14.
- Reposer la bouteille de remplissage de liquide de refroidissement comme d'origine.
- Remontez les deux carénages comme d'origine.
- Remontez les deux panneaux de remplissage comme d'origine.

ISSUE 1 27/05/2021 (NSY)

CONSUMER NOTICE

The catalogue description and any exhibition of samples are only broad indications of the Products and R&G may make design changes which do not diminish their performance or visual appeal and supplying them in such state shall conform to the order. The Buyer acknowledges no representation or warranty (other than as to title) has been given or will apply to the Products other than those in R&G's order or confirmation and the Buyer confirms it has chosen the Products as being of merchantable quality and suitable for its particular purposes. Where R&G fits the Products or undertakes other services it shall exercise reasonable skill and care and rectify any fault free of charge unless the workmanship has been disturbed. The Buyer is responsible for

R&G

Unit 1, Shelley's Lane, East Worldham, Alton, Hampshire, GU34 3AQ

Tel: +44 (0)1420 89007 Fax: +44 (0)1420 87301 www.rg-racing.com Email: info@rg-racing.com



ensuring that the warranty on the motorcycle is not affected by the fitting of the Products. On return of any defective Products R&G shall at its option either supply a replacement or refund the purchase money but shall not be liable if the Products have been modified or used or maintained otherwise than in accordance with R&G's or manufacturer's instructions and good engineering practice or if the defect arises from accident or neglect. Other than identified above and subject to R&G not limiting its liability for causing death and personal injury, it shall not be liable for indirect or consequential loss and otherwise its liability shall be limited to the amounts paid by the Buyer for the Products or the fitting or service concerned. These terms do not affect the Buyer's statutory rights.

R&G RETURNS POLICY (NON-FAULTY GOODS)

Returns must be pre-authorized (if not pre-authorized the return will be rejected). Goods may only be returned direct to us if they were purchased direct from us (customer must prove if necessary). Otherwise to be returned to original vendor. Goods must be in re-sellable condition, in the opinion of R&G. All returns are subject to a 25% restocking and handling fee (25% of the gross value exc. P&P – at the prevailing price at time of purchase). The customer must pay any and all carriage charges. No returns of discontinued products, unless within 14 days of purchase. This policy does not affect your statutory rights and does not refer to faulty goods.

R&G



**MONTAGEANLEITUNG FÜR RAD0261 KÜHLERSCHUTZ
FÜR TRIUMPH MOTO2 765 2020-**

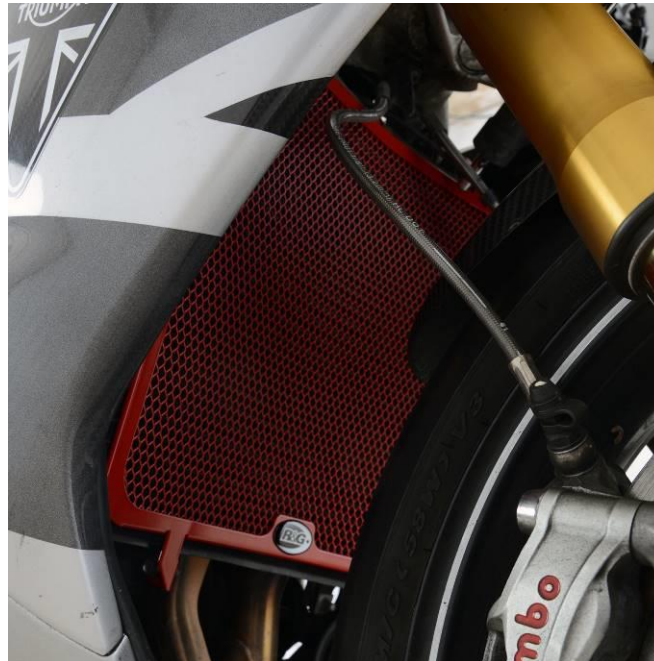


ABBILDUNG A

**ALLE KIT-TEILE SIND AUF DEN NACHFOLGENDEN SEITEN ABGEBILDET UND
GEKENNZEICHNET.**

DIE ABGEBILDETEN TEILE DIENEN LEDIGLICH ZUR ERKLÄRUNG.

ÜBERPRÜFEN SIE ZUERST, DASS ALLE TEILE VORHANDEN SIND.

LESEN SIE DIE MONTAGEANLEITUNG KOMPLETT DURCH, BEVOR SIE ANFANGEN.

**WENN SIE BEI DER MONTAGE DIESES PRODUKTES UNSICHER SIND,
BITTE EINEN UNSERER HÄNDLER KONTAKTIEREN ODER DAS KIT VON
EINEM QUALIFIZIERTEN ZWEIRAD-MECHANIKER MONTIEREN LASSEN.**

DIE VERPACKUNG DER TEILE STELLT NICHT DIE REIHENFOLGE DER MONTAGE DAR.

HINWEIS FÜR KITS MIT PLASTIKUNTERLEGSSCHEIBEN AN DEN SCHRAUBEN –
DIESE PLASTIK-UNTERLEGSSCHEIBEN WERDEN NICHT FÜR DEN EINBAU BENÖTIGT.

**EINE DIGITALE VERSION DIESER MONTAGEANLEITUNG KANN AUF
FOLGENDER SEITE HERUNTERGELADEN WERDEN:**


R&G

Unit 1, Shelley's Lane, East Worldham, Alton, Hampshire, GU34 3AQ
Tel: +44 (0)1420 89007 Fax: +44 (0)1420 87301 www.rg-racing.com Email: info@rg-racing.com



WWW.RG-RACING.COM

SIE BENÖTIGEN FOLGENDES WERKZEUG:	ALLGEM. ANZUGSDREHMOMENT
<ul style="list-style-type: none"> • Satz Inbusschlüssel • Satz Steckschlüssel • Schraubenzieher (Kreuzschlitz und flach) <ul style="list-style-type: none"> • Seitenschneider 	<p>M4 SCHRAUBE = 8Nm M5 SCHRAUBE = 12Nm M6 SCHRAUBE = 15Nm M8 SCHRAUBE = 20Nm M10 SCHRAUBE = 40Nm M12 SCHRAUBE = 40Nm</p>

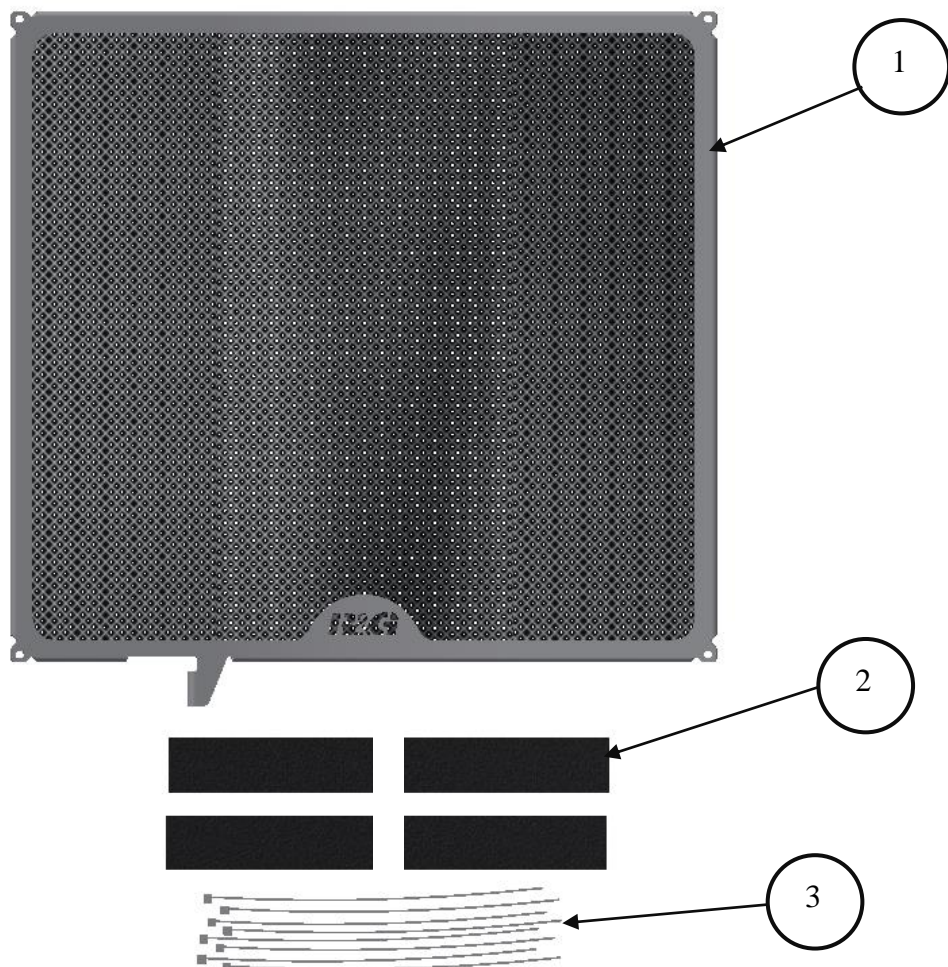

TEILE

R&G



LIEFERUMFANG

ARTIKEL NR.	BESCHREIBUNG	MENGE
ARTIKEL 1	KÜHLERSCHUTZ (RAD0261)	1
ARTIKEL 2	SELBSTKLEBENDER SCHAUMSTOFF (100mm LÄNGE)	4
ARTIKEL 3	2.5mm KABELBINDER	8

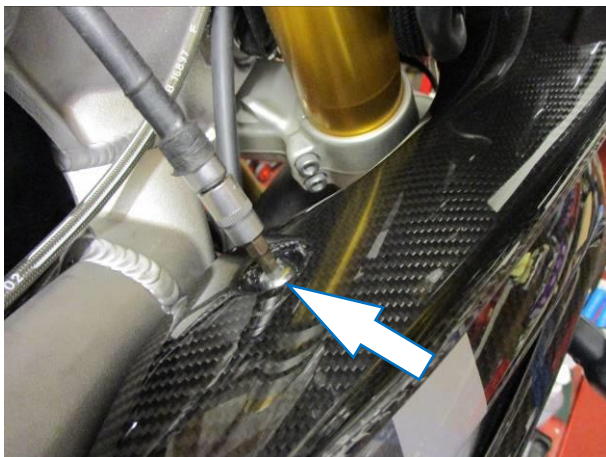


ABBILDUNG 1

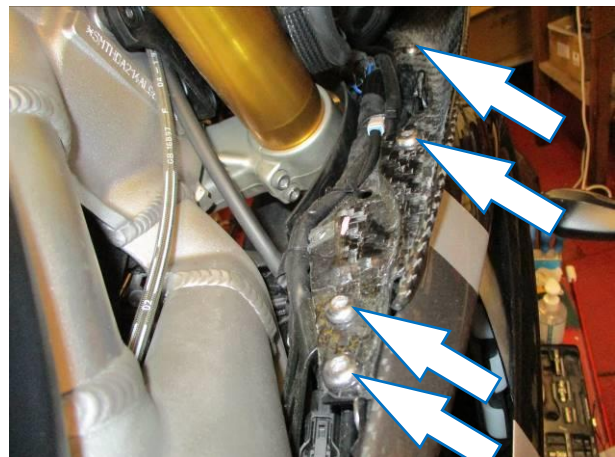


ABBILDUNG 2

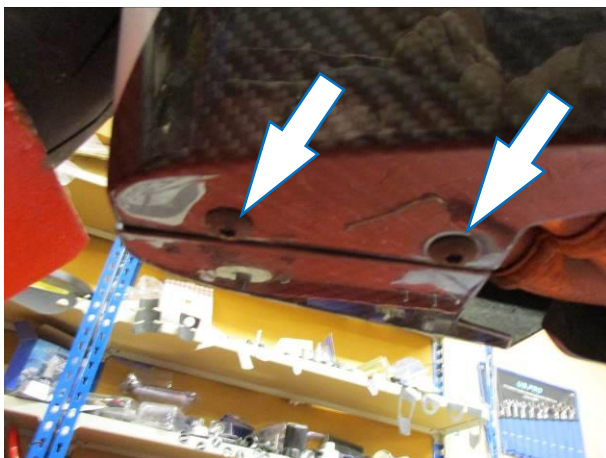


ABBILDUNG 3



ABBILDUNG 4



ABBILDUNG 5

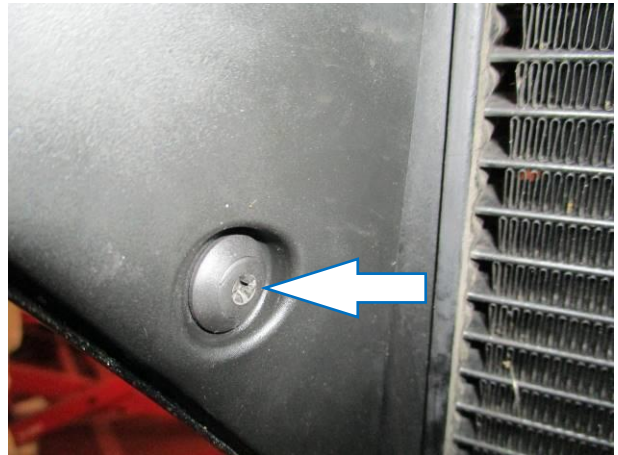


ABBILDUNG 6

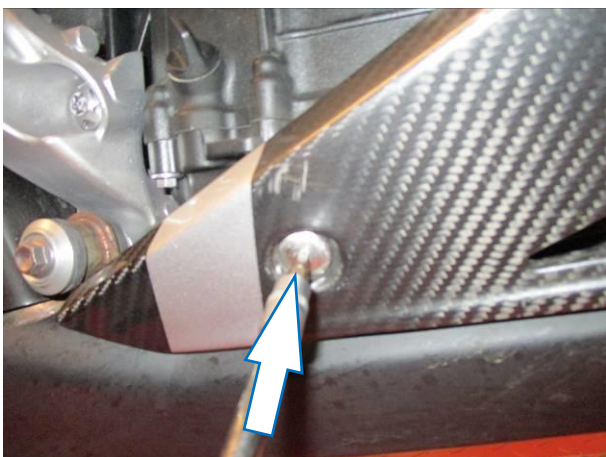


ABBILDUNG 7



ABBILDUNG 8



ABBILDUNG 9

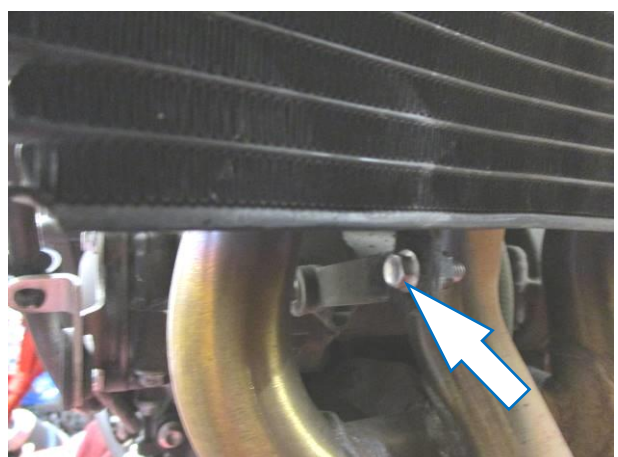


ABBILDUNG 10

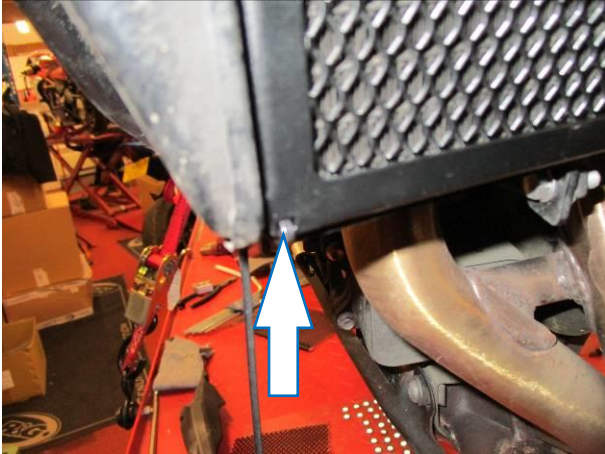


ABBILDUNG 11

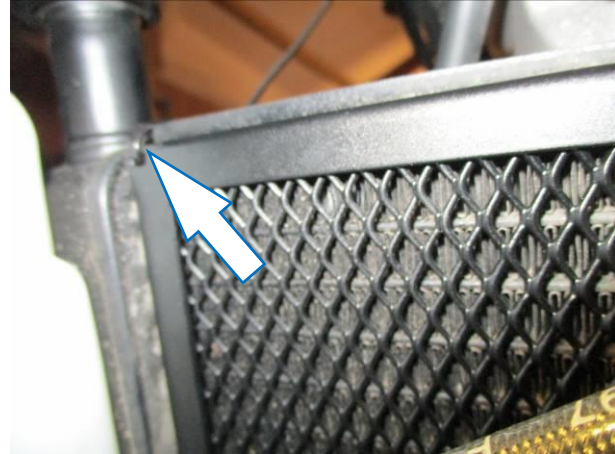


ABBILDUNG 12

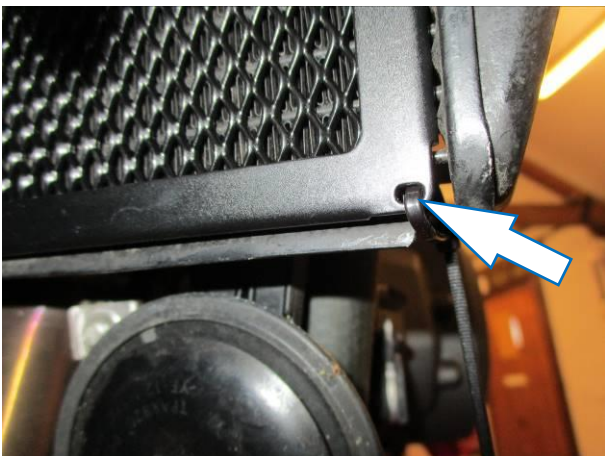


ABBILDUNG 13

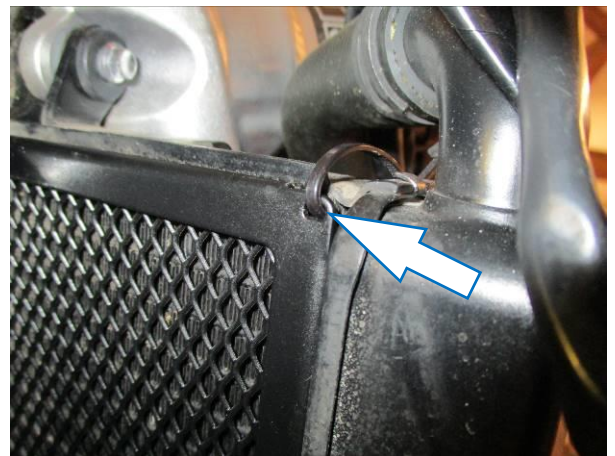


ABBILDUNG 14

MONTAGEANLEITUNG

Rechte Seite (in Fahrtrichtung)

- Entfernen Sie die Schraube, die in **Abbildung 1** markiert ist und entfernen Sie das innere Verkleidungsteil.
- Entfernen Sie die 4 Schrauben, die in **Abbildung 2** gekennzeichnet sind.
- Entfernen Sie die 2 Schrauben, die in **Abbildung 3** gekennzeichnet sind.
- Entfernen Sie die 4 Kunststoffnieten, die in den **Abbildungen 4, 5 & 6** markiert sind.
- Entfernen Sie die 2 Schrauben, die in den **Abbildungen 7 und 8** gekennzeichnet sind.
- Entfernen Sie nun vorsichtig die Verkleidung.

Linke Seite (in Fahrtrichtung)

R&G

Unit 1, Shelley's Lane, East Worldham, Alton, Hampshire, GU34 3AQ


Tel: +44 (0)1420 89007 Fax: +44 (0)1420 87301 www.rg-racing.com Email: info@rg-racing.com



- Wiederholen Sie die oben beschriebenen Schritte mit der Verkleidung und dem Verkleidungsteil an der linken Seite.

Rechte Seite (in Fahrtrichtung)

- Entfernen Sie die zwei Schrauben, die in **Abbildung 9** markiert sind und den Kühlmittelausgleichsbehälter nicht ganz abmontieren, nur um ausreichend Zugang zu ermöglichen - nicht komplett entfernen.
- Entfernen Sie die Schraube, die in **Abbildung 10** gekennzeichnet ist.
- Um den Kühlerschutz am Motorrad montieren zu können, schneiden Sie die mitgelieferten Schaumstoffstreifen (**Artikel 2**) in 10 mm breite Streifen und kleben Sie diese auf der Rückseite des Kühlerschutzrahmens (**Artikel 1**), so dass sie zwischen dem Kühlerschutz und dem Kühler angebracht sind wie **unten abgebildet**.

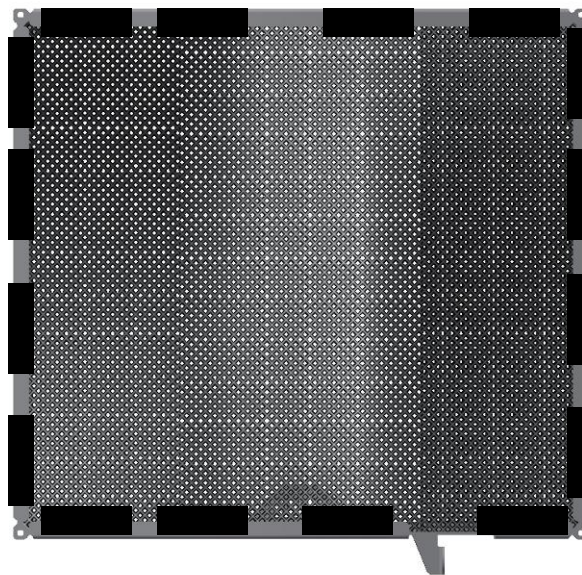

- Den Kühlerschutz in Position bringen und an der unteren Montagehalterung mit der Originalschraube befestigen.
- Benutzen Sie die mitgelieferten Kabelbinder (**Artikel 3**), um den Kühlerschutz in Position zu befestigen. Stellen Sie sicher, dass die Kabelbinder um die oberen Halterungen gewickelt und durch den Kühlerahmen gefädelt sind, nicht durch das Gitter des Kühlerschutz – siehe **Abbildungen 11, 12, 13 und 14**).
- Montieren Sie den Kühlmittelausgleichsbehälter wie ursprünglich wieder.
- Montieren Sie beide Verkleidungen wie ursprünglich wieder.
- Montieren Sie beide inneren Verkleidungsteile wie ursprünglich wieder.

AUSGABE 1 27/05/2021 (NSY)

CONSUMER NOTICE

The catalogue description and any exhibition of samples are only broad indications of the Products and R&G may make design changes which do not diminish their performance or visual appeal and supplying them in such state shall conform to the order. The Buyer acknowledges no representation or warranty (other than as to title) has been given or will apply to the Products other than those in R&G's order or confirmation and the Buyer confirms it has chosen the Products

R&G

Unit 1, Shelley's Lane, East Worldham, Alton, Hampshire, GU34 3AQ

Tel: +44 (0)1420 89007 Fax: +44 (0)1420 87301 www.rg-racing.com Email: info@rg-racing.com



as being of merchantable quality and suitable for its particular purposes. Where R&G fits the Products or undertakes other services it shall exercise reasonable skill and care and rectify any fault free of charge unless the workmanship has been disturbed. The Buyer is responsible for ensuring that the warranty on the motorcycle is not affected by the fitting of the Products. On return of any defective Products R&G shall at its option either supply a replacement or refund the purchase money but shall not be liable if the Products have been modified or used or maintained otherwise than in accordance with R&G's or manufacturer's instructions and good engineering practice or if the defect arises from accident or neglect. Other than identified above and subject to R&G not limiting its liability for causing death and personal injury, it shall not be liable for indirect or consequential loss and otherwise its liability shall be limited to the amounts paid by the Buyer for the Products or the fitting or service concerned. These terms do not affect the Buyer's statutory rights.

R&G RETURNS POLICY (NON-FAULTY GOODS)

Returns must be pre-authorized (if not pre-authorized the return will be rejected). Goods may only be returned direct to us if they were purchased direct from us (customer must prove if necessary). Otherwise to be returned to original vendor. Goods must be in re-sellable condition, in the opinion of R&G. All returns are subject to a 25% restocking and handling fee (25% of the gross value exc. P&P – at the prevailing price at time of purchase). The customer must pay any and all carriage charges. No returns of discontinued products, unless within 14 days of purchase. This policy does not affect your statutory rights and does not refer to faulty goods.

R&G

Unit 1, Shelley's Lane, East Worldham, Alton, Hampshire, GU34 3AQ
Tel: +44 (0)1420 89007 Fax: +44 (0)1420 87301 www.rg-racing.com Email: info@rg-racing.com