




FITTING INSTRUCTIONS FOR RAD0384PRO

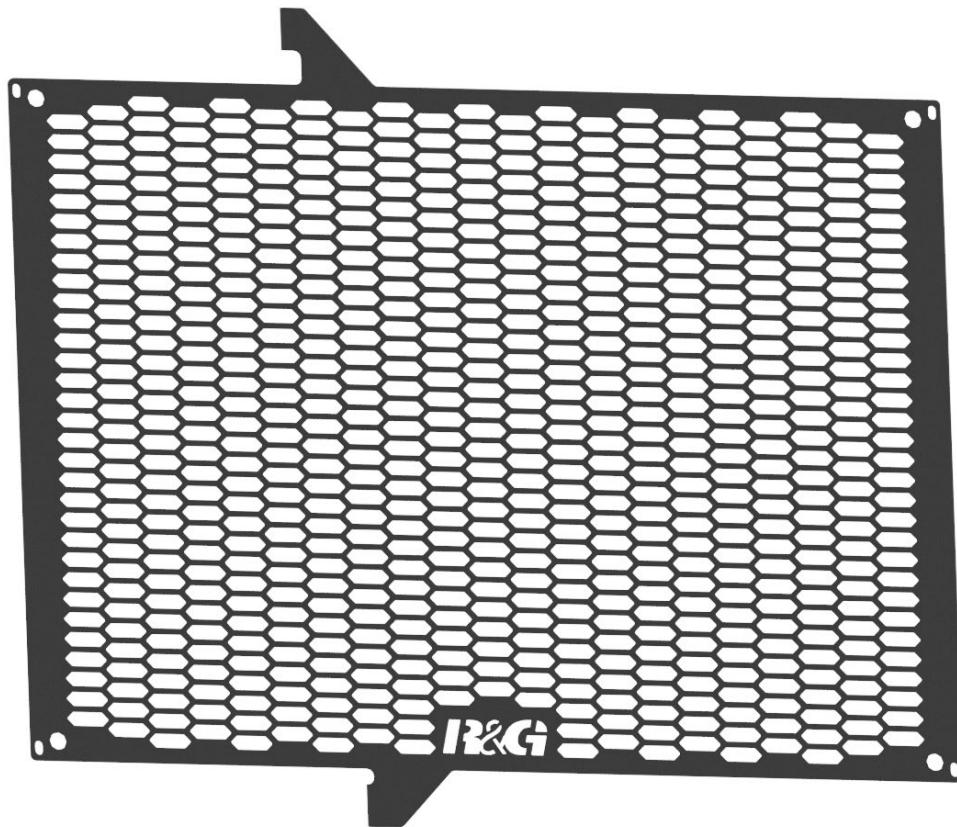

THIS KIT CONTAINS THE ITEMS PICTURED AND LABELLED OVER PAGE.
SOME PARTS MAY BE SHOWN FOR CLARITY OF INSTRUCTIONS ONLY.

DO NOT PROCEED UNTIL YOU ARE SURE ALL PARTS ARE PRESENT.

PLEASE READ ALL INSTRUCTIONS BEFORE PROCEEDING.

**IF IN ANY DOUBT WHEN FITTING OUR PRODUCTS, CONSULT ONE OF OUR DEALERS
OR HAVE FITTED BY A QUALIFIED TECHNICIAN.**

PLEASE NOTE THAT THE WAY THE KIT IS PACKED DOES NOT NECESSARILY REPRESENT THE WAY OF
MOUNTING TO THE BIKE.

IN THE EVENT OF RUBBER WASHERS BEING USED TO HOLD COMPONENTS ONTO BOLTS,
THESE RUBBER WASHERS CAN BE THROWN AWAY.




<u>TOOLS REQUIRED</u>	<u>GENERAL TORQUE SETTINGS</u>						
<ul style="list-style-type: none"> • Socket and ratchet set to include 8mm and 10mm A/F or spanners. 	<table> <tbody> <tr> <td>M4 BOLT = 8Nm</td> </tr> <tr> <td>M5 BOLT = 12Nm</td> </tr> <tr> <td>M6 BOLT = 15Nm</td> </tr> <tr> <td>M8 BOLT = 20Nm</td> </tr> <tr> <td>M10 BOLT = 40Nm</td> </tr> <tr> <td>M12 BOLT = 40Nm</td> </tr> </tbody> </table>	M4 BOLT = 8Nm	M5 BOLT = 12Nm	M6 BOLT = 15Nm	M8 BOLT = 20Nm	M10 BOLT = 40Nm	M12 BOLT = 40Nm
M4 BOLT = 8Nm							
M5 BOLT = 12Nm							
M6 BOLT = 15Nm							
M8 BOLT = 20Nm							
M10 BOLT = 40Nm							
M12 BOLT = 40Nm							

LEGEND

ITEM NO.	DESCRIPTION	QTY
ITEM 1	RADIATOR GUARD (RAD0384)	1
ITEM 2	RUBBER BUNGS (RB0015)	4
ITEM 3	CABLE TIES	4

ASSEMBLY DIAGRAMS

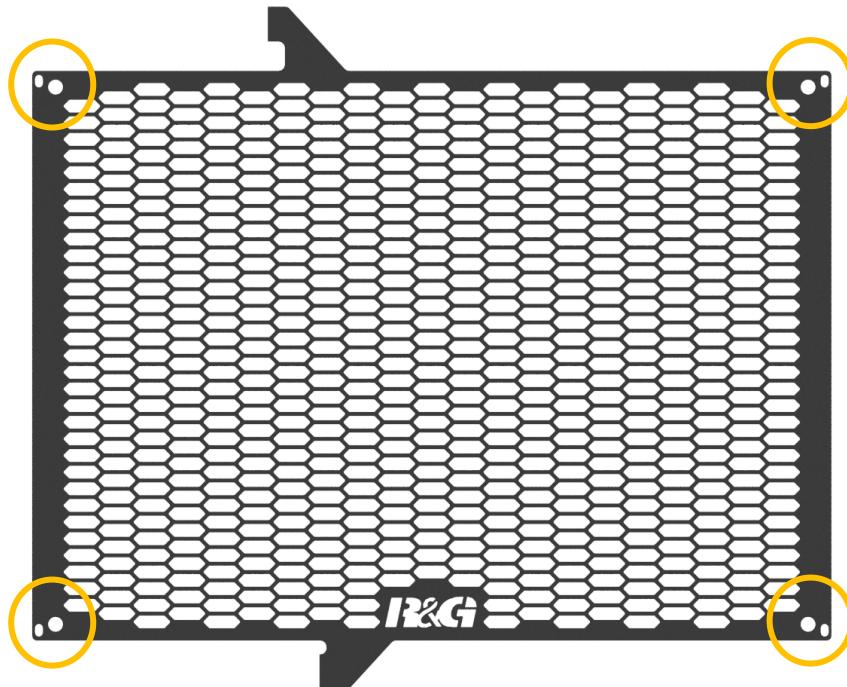




FITTING PICTURES


FRONT OF RAD GUARD



PICTURE 1

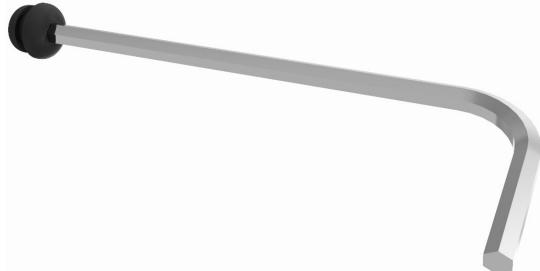

PICTURE 2

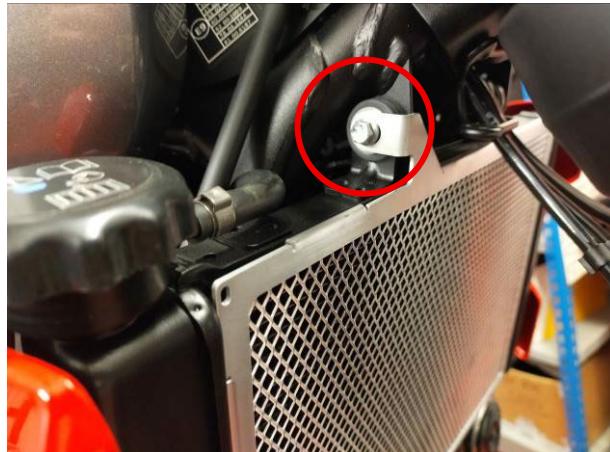

PICTURE 3



PICTURE 4

FITTING INSTRUCTIONS

- Firstly, carefully clean the radiator, being careful not to damage any of the fins.
- Prepare the radiator guard by inserting the 4x rubber bungs (**Item 5**) into the radiator guard in the positions circled in orange in the Assembly Diagram.

Please note: Fitting the bungs is much easier with the use of a 3mm allen/hex key as shown in **Picture 2**, place the bungs on the end of the allen key and carefully push through the holes in the orientation shown in **Picture 1**.

- Remove the top radiator mount as shown in **PICTURE 3** & the lower radiator mount as shown in **PICTURE 4**.
- Offer up the R&G radiator guard and replace the 2 fixings, making sure that the radiator guard is in the correct position, before tightening the bolts to their required torque setting.
- Attach the supplied cable ties to the 4 corners of the radiator to ensure a secure fit.
- Once the cable ties are secure, trim off the excess with a pair of scissors.

ISSUE 1 – 30/10/2025 (MH)

**CONSUMER NOTICE**

The catalogue description and any exhibition of samples are only broad indications of the Products and R&G may make design changes which do not diminish their performance or visual appeal and supplying them in such state shall conform to the order. The Buyer acknowledges no representation or warranty (other than as to title) has been given or will apply to the Products other than those in R&G's order or confirmation and the Buyer confirms it has chosen the Products as being of merchantable quality and suitable for its particular purposes. Where R&G fits the Products or undertakes other services it shall exercise reasonable skill and care and rectify any fault free of charge unless the workmanship has been disturbed. The Buyer is responsible for ensuring that the warranty on the motorcycle is not affected by the fitting of the Products. On return of any defective Products R&G shall at its option either supply a replacement or refund the purchase money but shall not be liable if the Products have been modified or used or maintained otherwise than in accordance with R&G's or manufacturer's instructions and good engineering practice or if the defect arises from accident or neglect. Other than identified above and subject to R&G not limiting its liability for causing death and personal injury, it shall not be liable for indirect or consequential loss and otherwise its liability shall be limited to the amounts paid by the Buyer for the Products or the fitting or service concerned. These terms do not affect the Buyer's statutory rights.

R&G RACING RETURNS POLICY (NON-FAULTY GOODS)

Returns must be pre-authorised (if not pre-authorised the return will be rejected). Goods may only be returned direct to us if they were purchased direct from us (customer must prove if necessary). Otherwise to be returned to original vendor. Goods must be in re-sellable condition, in the opinion of R&G Racing. All returns are subject to a 25% restocking and handling fee (25% of the gross value exc. P&P – at the prevailing price at time of purchase). The customer must pay any and all carriage charges. No returns of discontinued products, unless within 14 days of purchase. This policy does not affect your statutory rights and does not refer to faulty goods.


Racing Technique Ltd T/A R&G

Unit 1, Shelley's Lane, East Worldham, Alton, Hampshire, GU34 3AQ

Tel: +44 (0)1420 89007 Fax: +44 (0)1420 87301 www.rg-racing.com Email: info@rg-racing.com



NOTICE DE MONTAGE POUR RAD0384PRO

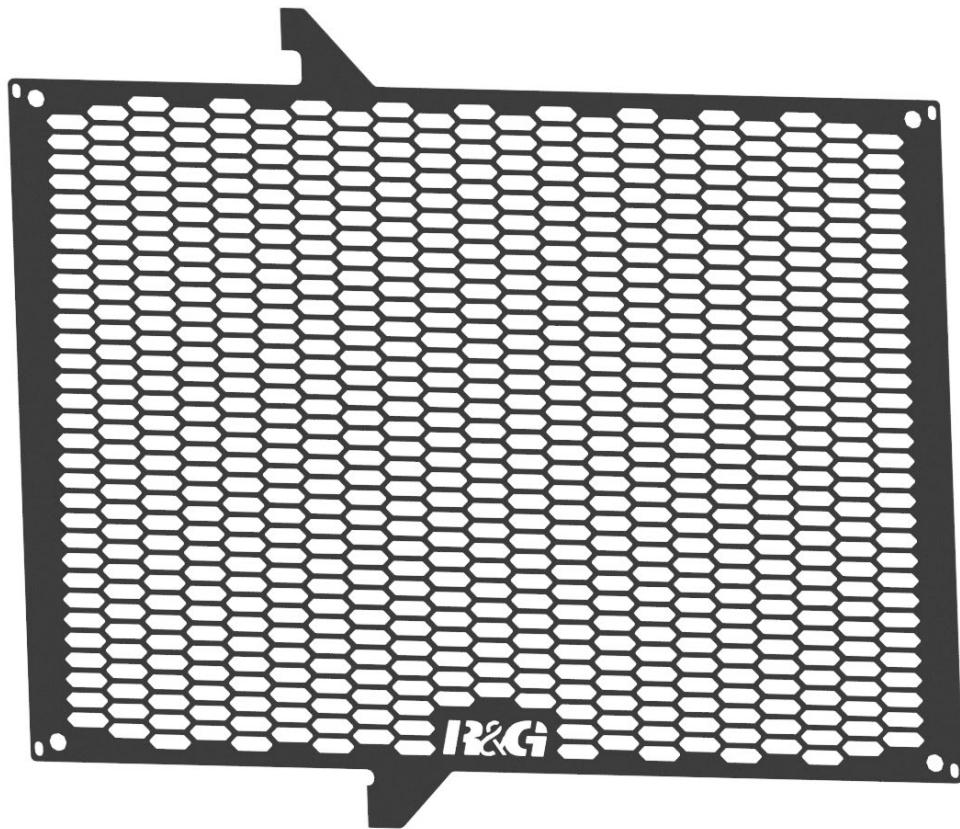

CE KIT CONTIENT LES ARTICLES ILLUSTRES ET ETIQUETES SUR LA PAGE.

CERTAINES PARTIES PEUVENT ETRE PRESENTES UNIQUEMENT POUR LA CLARTE DES INSTRUCTIONS.

NE PAS PROCEDER AU MONTAGE TANT QUE VOUS N'ETES PAS SUR QUE TOUTES LES PIECES SOIENT PRESENTES.

VEUILLEZ LIRE TOUTES LES INSTRUCTIONS AVANT DE CONTINUER.

**EN CAS DE DOUTE LORS DU MONTAGE DE NOS PRODUITS, CONSULTEZ UN DE NOS
REVENDEURS OU FAITES APPEL A UN TECHNICIEN QUALIFIÉ.**

VEUILLEZ NOTER QUE LA FAÇON DONT LE KIT EST EMBALLE NE REPRESENTE PAS NECESSAIREMENT LA MANIERE DE
LE MONTER SUR LA MOTO.

SI DES RONDELLES EN CAOUTCHOUC SONT UTILISEES POUR MAINTENIR LES COMPOSANTS SUR LES BOULONS,
ELLES PEUVENT ETRE JETEES.

NOTICE DISPONIBLE AU TELECHARGEMENT SUR :
WWW.RG-RACING.COM




<u>OUTILS REQUIS</u>	<u>VALEURS DE SERRAGE</u>
<ul style="list-style-type: none"> • Jeu de douilles et de cliquet comprenant des clés plates de 8 mm et 10 mm. 	M4 BOULON = 8Nm M5 BOULON = 12Nm M6 BOULON = 15Nm M8 BOULON = 20Nm M10 BOULON = 40Nm M12 BOULON = 40Nm

LÉGENDE

ARTICLE NO.	DESCRIPTION	QTÉ
ARTICLE 1	PROTECTION RADIADEUR (RAD0384)	1
ARTICLE 2	BOUCHONS EN CAOUTCHOUC (RB0015)	4
ARTICLE 3	COLLIERS DE SERRAGE	4

SCHÉMAS D'ENSEMBLE

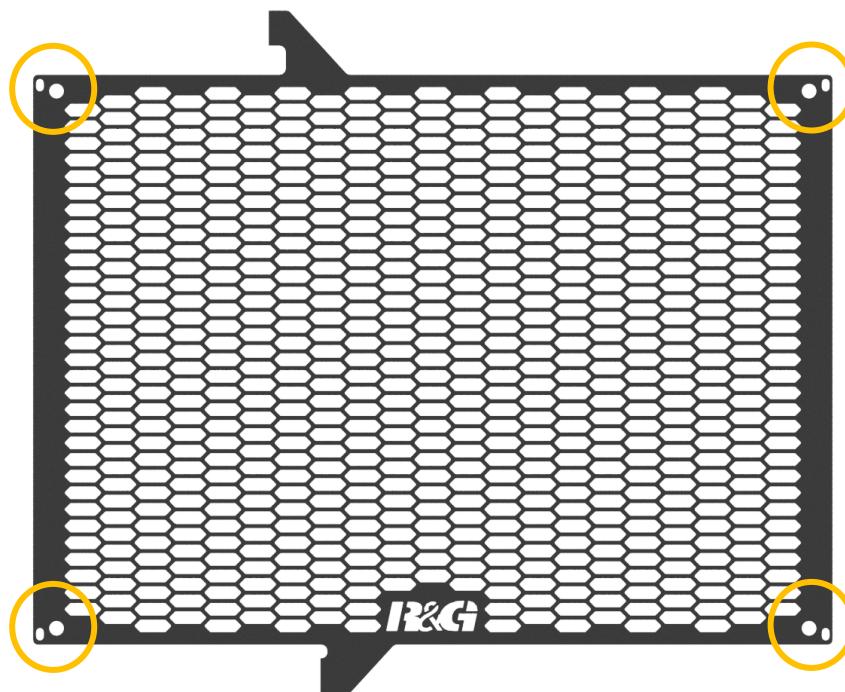

PHOTOS DE MONTAGE

AVANT DE LA PROTECTION RADIATEUR



PHOTO 1

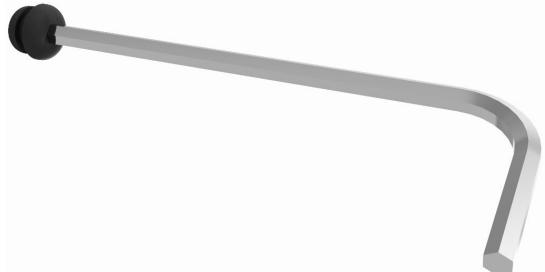


PHOTO 2



PHOTO 3



PHOTO 4

NOTICE DE MONTAGE

- Commencez par nettoyer soigneusement le radiateur, en veillant à ne pas endommager les ailettes.
- Préparez la grille de protection radiateur en insérant les 4 bouchons en caoutchouc (pièce n° 5) aux emplacements entourés en orange sur le schéma de montage.

Note : Le montage des bouchons est beaucoup plus facile avec l'utilisation d'une clé Allen/hexagonale de 3 mm comme indiqué sur l'image 2, placez les bouchons sur l'extrémité de la clé Allen et poussez soigneusement à travers les trous dans l'orientation indiquée sur l'image 1.

- Retirez la fixation supérieure du radiateur (voir image 3) et la fixation inférieure (voir image 4).
- Présentez la grille de protection de radiateur R&G et remettez en place les deux fixations, en vous assurant que la grille soit correctement positionnée, avant de serrer les boulons au couple prescrit.
- Fixez les colliers de serrage fournis aux quatre coins du radiateur pour un maintien optimal.
- Une fois les colliers de serrage en place, coupez l'excédent avec des ciseaux.

ISSUE 1 – 30/10/2025 (MH)



CONSUMER NOTICE

The catalogue description and any exhibition of samples are only broad indications of the Products and R&G may make design changes which do not diminish their performance or visual appeal and supplying them in such state shall conform to the order. The Buyer acknowledges no representation or warranty (other than as to title) has been given or will apply to the Products other than those in R&G's order or confirmation and the Buyer confirms it has chosen the Products as being of merchantable quality and suitable for its particular purposes. Where R&G fits the Products or undertakes other services it shall exercise reasonable skill and care and rectify any fault free of charge unless the workmanship has been disturbed. The Buyer is responsible for ensuring that the warranty on the motorcycle is not affected by the fitting of the Products. On return of any defective Products R&G shall at its option either supply a replacement or refund the purchase money but shall not be liable if the Products have been modified or used or maintained otherwise than in accordance with R&G's or manufacturer's instructions and good engineering practice or if the defect arises from accident or neglect. Other than identified above and subject to R&G not limiting its liability for causing death and personal injury, it shall not be liable for indirect or consequential loss and otherwise its liability shall be limited to the amounts paid by the Buyer for the Products or the fitting or service concerned. These terms do not affect the Buyer's statutory rights.

R&G RACING RETURNS POLICY (NON-FAULTY GOODS)

Returns must be pre-authorised (if not pre-authorised the return will be rejected). Goods may only be returned direct to us if they were purchased direct from us (customer must prove if necessary). Otherwise to be returned to original vendor. Goods must be in re-sellable condition, in the opinion of R&G Racing. All returns are subject to a 25% restocking and handling fee (25% of the gross value exc. P&P – at the prevailing price at time of purchase). The customer must pay any and all carriage charges. No returns of discontinued products, unless within 14 days of purchase. This policy does not affect your statutory rights and does not refer to faulty goods.

Racing Technique Ltd T/A R&G

Unit 1, Shelley's Lane, East Worldham, Alton, Hampshire, GU34 3AQ

Tel: +44 (0)1420 89007 Fax: +44 (0)1420 87301 www.rg-racing.com Email: info@rg-racing.com