



FITTING INSTRUCTIONS FOR FP0109 FORK PROTECTORS
DUCATI 1199 PANIGALE (ALL VERSIONS) 2012-




THIS KIT CONTAINS THE ITEMS PICTURED AND LABELLED BELOW.
DO NOT PROCEED UNTIL YOU ARE SURE ALL PARTS ARE PRESENT.

Please note that the way the kit is packed does not necessarily represent the way of mounting to the bike

Please note that in cases where kits are packed with a plastic tube separating components on the spindle bar (this tube should be discarded).

THE PARTS SHOWN MAY BE REPRESENTATIVE ONLY (FOR CLARITY OF INSTRUCTIONS ONLY)

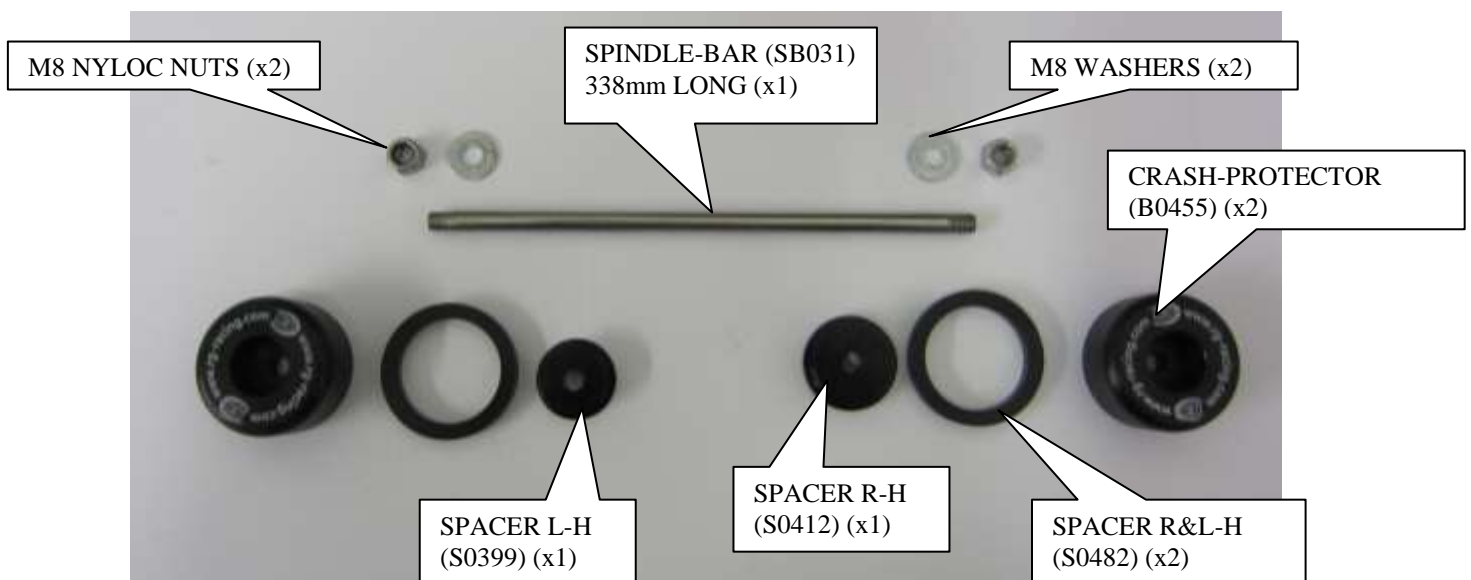



ADDITIONAL PARTS FOR STANDARD PANIGALE

1 x SO486 SPACER 1.5mm WIDE FOR USE ON THE STANDARD MODEL (NOT SHOWN)

TOOLS REQUIRED

- Socket set to include 2x 13sockets and wrenches

FITTING INSTRUCTIONS

- Fit the larger solid location spacer (S0412) into recess in right hand side of front spindle.
- Place one of the tube type spacers (S0482) over the outside of spacer just fitted (PLEASE NOTE:- on the standard model the thinner tube type spacer (S0486) should be placed over the location spacer before the wider spacer is fitted (S0482)).
- Fit one nut and washer on spindle-bar (SB031) (the end with shorter thread), engage the nut so the plastic insert of nut is fully engaged.
- Feed spindle-bar with nut and washer through either crash protector and through spindle spacer (from the right hand side) just fitted.
- Place remaining solid location spacer (S0399) with smaller spigot over exposed left hand end of spindle-bar so the smaller spigot locates in left hand side of spindle.
- Place the remaining tube type spacer (S0482) over the original spindle nut.
- Place the remaining crash protector over the exposed end of the spindle bar.
- Fit washer and nut from kit onto thread and tighten until both nuts are engaged in nylon and equal amounts protrude from either side (please ensure the logo is located at the top of the crash protector). Do not overtighten – the nyloc nuts will hold it tight.

ISSUE 2 24/05/2012 (NSY/AR/SH)

CONSUMER NOTICE

The catalogue description and any exhibition of samples are only broad indications of the Products and R&G may make design changes which do not diminish their performance or visual appeal and supplying them in such state shall conform to the order. The Buyer acknowledges no representation or warranty (other than as to title) has been given or will apply to the Products other than those in R&G's order or confirmation and the Buyer confirms it has chosen the Products as being of merchantable quality and suitable for its particular purposes. Where R&G fits the Products or undertakes other services it shall exercise reasonable skill and care and rectify any fault free of charge unless the workmanship has been disturbed. The Buyer is responsible for ensuring that the warranty on the motorcycle is not affected by the fitting of the Products. On return of any defective Products R&G shall at its option either supply a replacement or refund the purchase money but shall not be liable if the Products have been modified or used or maintained otherwise than in accordance with R&G's or manufacturer's instructions and good engineering practice or if the defect arises from accident or neglect. Other than identified above and subject to R&G not limiting its liability for causing death and personal injury, it shall not be liable for indirect or consequential loss and otherwise its liability shall be limited to the amounts paid by the Buyer for the Products or the fitting or service concerned. These terms do not affect the Buyer's statutory rights.

R&G RACING RETURNS POLICY (NON-FAULTY GOODS)

Returns must be pre-authorized (if not pre-authorized the return will be rejected). Goods may only be returned direct to us if they were purchased direct from us (customer must prove if necessary). Otherwise to be returned to original vendor. Goods must be in resellable condition, in the opinion of R&G Racing. All returns are subject to a 25% restocking and handling fee (25% of the gross value exc. P&P – at the prevailing price at time of purchase). The customer must pay any and all carriage charges. No returns of discontinued products, unless within 14 days of purchase. This policy does not affect your statutory rights and does not refer to faulty goods.

R&G Racing

Unit 1, Shelley's Lane, East Worldham, Alton, Hampshire, GU34 3AQ

Tel: +44 (0)1420 89007 Fax: +44 (0)1420 87301 www.rg-racing.com Email: info@rg-racing.com



Notice de montage


FP0109 Protections fourche
DUCATI 1199 Panigale 2012-



Vérifier que toutes les pièces soient bien présentes avant de déballer complètement.

La façon dont le kit est emballé ne représente pas nécessairement la façon de le monter sur la moto.

Les parties représentées peuvent parfois être uniquement représentatives
(Pour la clarté des explications)

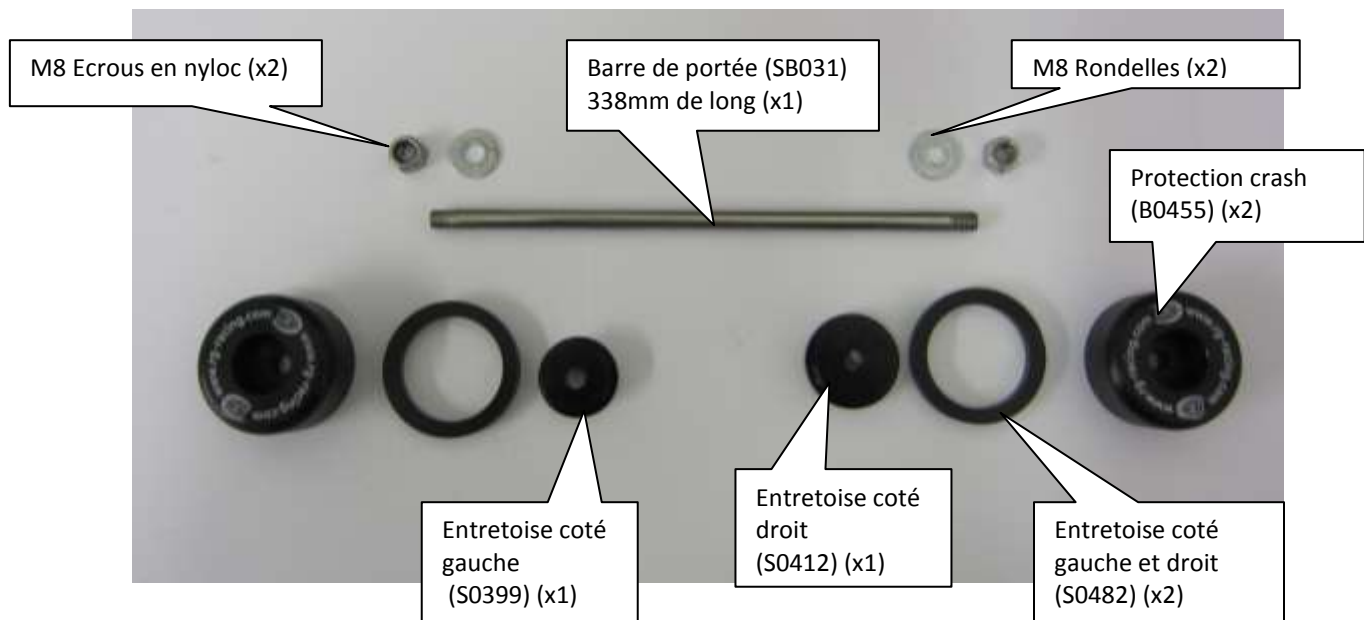

R&G Racing

Unit 1, Shelley's Lane, East Worldham, Alton, Hampshire, GU34 3AQ
Tel: +44 (0)1420 89007 Fax: +44 (0)1420 87301 www.rg-racing.com Email: info@rg-racing.com



Outils requis:

- 2x 13 clés
- **COMPOSANTS SUPPLEMENTAIRES A UTILISER SI VOUS AVEZ LE MODELE DE BASE "PANIGALE"**
 - 1 x ENTRETOISE CODE S0486 [1,5mm DE DIAMETRE] (NON FIGURANT DANS L'ILLUSTRATION EN DESSUS).

Instructions de montage:

- Passer la grosse entretoise (S0412) dans l'évidement du coté droit de la barre de portée.
- Placer une des entretoises (S0482) autour de l'entretoise tout juste installée (NOTER:- pour le modèle de base Panigale, l'entretoise plus épaisse de type tubulaire (S0486) devrait être placée sur l'entretoise de positionnement avant que l'entretoise plus large ne soit installée (S0482)).
- Mettre un écrou et une rondelle sur la barre de portée SB031 (l'extrémité avec le filetage le plus court), et engager l'écrou de sorte à ce que l'insert en plastic de l'écrou soit complètement engagé.
- Passer la barre de portée avec l'écrou et la rondelle à travers une des 2 protection et à travers l'entretoise de la barre de portée (du coté droit) tout juste installée.
- Placer l'entretoise S0399 avec le plus petit fausset autour de l'extrémité du coté gauche de la barre de portée pour que le plus petit fausset se loge du coté gauche de la barre de portée.
- Placer l'entretoise S0482 autour de l'écrou de la barre d'origine.
- Placer la protection restante autour de l'extrémité de la barre de portée.
- Installer la rondelle et écrou du kit puis serrer pour que les 2 écrous soient bien engagés dans le nylon et dépassent de la même longueur de chaque coté (assurez vous que le logo soit bien placé en haut de la protection. Ne pas trop serrer, les écrous en nyloc tiendront en place.

CONSUMER NOTICE

The catalogue description and any exhibition of samples are only broad indications of the Products and R&G may make design changes which do not diminish their performance or visual appeal and supplying them in such state shall conform to the order. The Buyer acknowledges no representation or warranty (other than as to title) has been given or will apply to the Products other than those in R&G's order or confirmation and the Buyer confirms it has chosen the Products as being of merchantable quality and suitable for its particular purposes. Where R&G fits the Products or undertakes other services it shall exercise reasonable skill and care and rectify any fault free of charge unless the workmanship has been disturbed. The Buyer is responsible for ensuring that the warranty on the motorcycle is not affected by the fitting of the Products. On return of any defective Products R&G shall at its option either supply a replacement or refund the purchase money but shall not be liable if the Products have been modified or used or maintained otherwise than in accordance with R&G's or manufacturer's instructions and good engineering practice or if the defect arises from accident or neglect. Other than identified above and subject to R&G not limiting its liability for causing death and personal injury, it shall not be liable for indirect or consequential loss and otherwise its liability shall be limited to the amounts paid by the Buyer for the Products or the fitting or service concerned. These terms do not affect the Buyer's statutory rights.

R&G RACING RETURNS POLICY (NON-FAULTY GOODS)

Returns must be pre-authorized (if not pre-authorized the return will be rejected). Goods may only be returned direct to us if they were purchased direct from us (customer must prove if necessary). Otherwise to be returned to original vendor. Goods must be in resellable condition, in the opinion of R&G Racing. All returns are subject to a 25% restocking and handling fee (25% of the gross value exc. P&P – at the prevailing price at time of purchase). The customer must pay any and all carriage charges. No returns of discontinued products, unless within 14 days of purchase. This policy does not affect your statutory rights and does not refer to faulty goods.

R&G Racing

Unit 1, Shelley's Lane, East Worldham, Alton, Hampshire, GU34 3AQ

Tel: +44 (0)1420 89007 Fax: +44 (0)1420 87301 www.rg-racing.com Email: info@rg-racing.com