



FITTING INSTRUCTIONS FOR LP0395BK
LICENCE PLATE BRACKET



This kit contains the items pictured and labelled over page.
Some parts may be shown for clarity of instructions only.
Do not proceed until you are sure all parts are present.
Please read all instructions before proceeding.

IF IN ANY DOUBT WHEN FITTING OUR PRODUCTS, CONSULT ONE OF OUR DEALERS
OR HAVE FITTED BY A QUALIFIED TECHNICIAN.

Please note that the way the kit is packed does not necessarily represent the way of mounting to the bike.

In the event of rubber washers being used to hold components onto bolts, these rubber washers can be thrown away.




<u>TOOLS REQUIRED</u>	<u>GENERAL TORQUE SETTINGS</u>
- Set of metric Hex keys to include 5mm & 6mm. - Set of metric sockets and wrench. To include 8mm, 10mm & 12mm. - Cable cutters	M4 BOLT = 8Nm M5 BOLT = 12Nm M6 BOLT = 15Nm M8 BOLT = 20Nm M10 BOLT = 40Nm M12 BOLT = 40Nm

LEGEND


ITEM No.	DESCRIPTION	QTY
ITEM 1	MAIN MOUNTING BRACKET	1
ITEM 2	LICENCE PLATE BRACKET	1
ITEM 3	COVER PLATE	1
ITEM 4	NUMBER PLATE LIGHT	1
ITEM 5	M6X30mm BUTTON HEAD BOLT	4
ITEM 6	M6 NYLOC NUT	4
ITEM 7	6X12mm WASHER	8
ITEM 8	M5X12mm COUNTERSUNK BOLT	4
ITEM 9	M5 NYLOC NUT	4
ITEM 10	5x10mm WASHER	4
ITEM 11	RUBBER BUNG	2




Assembly Diagram

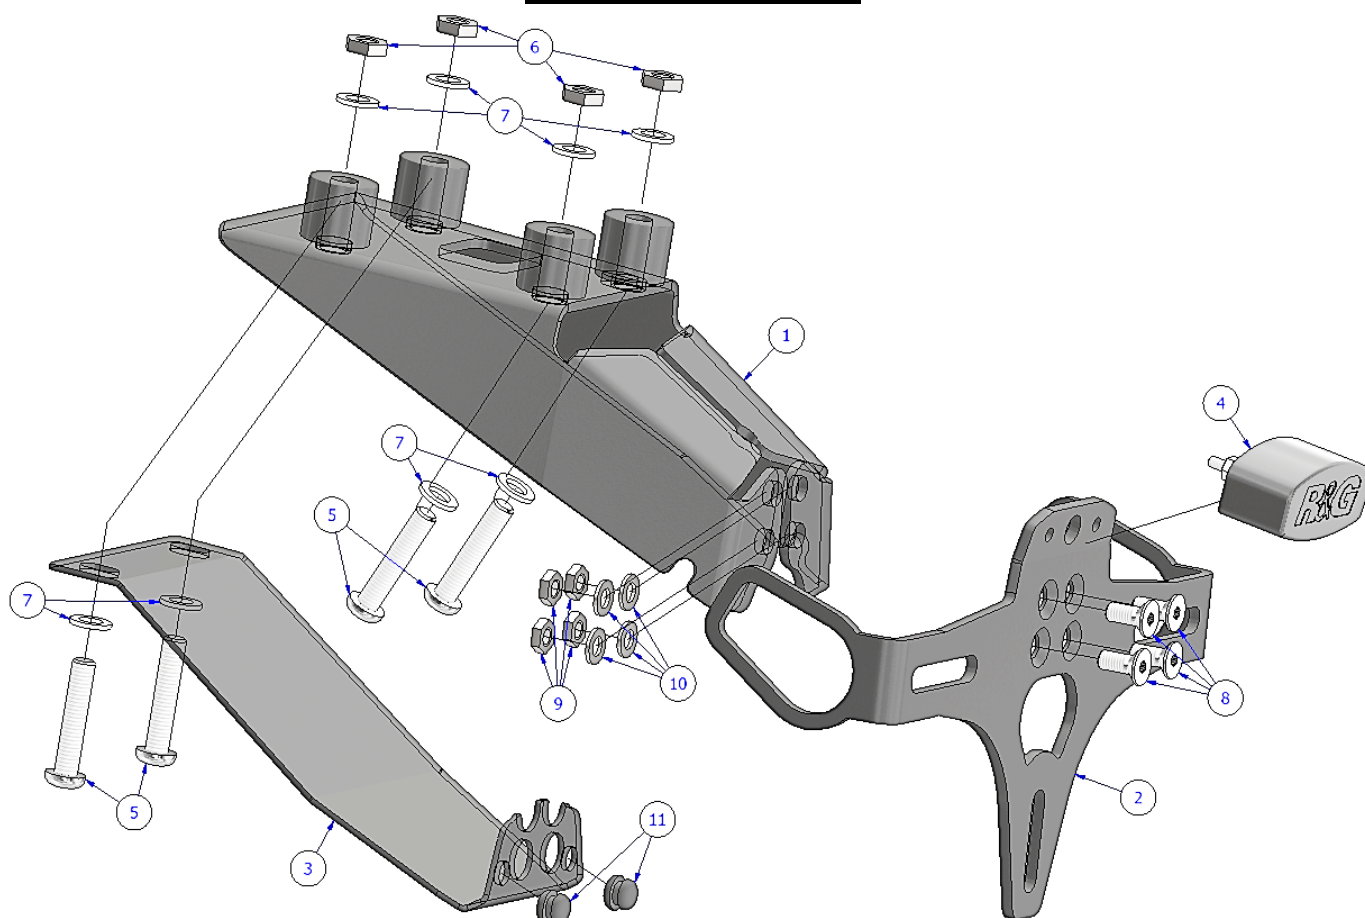


FITTING PICTURES

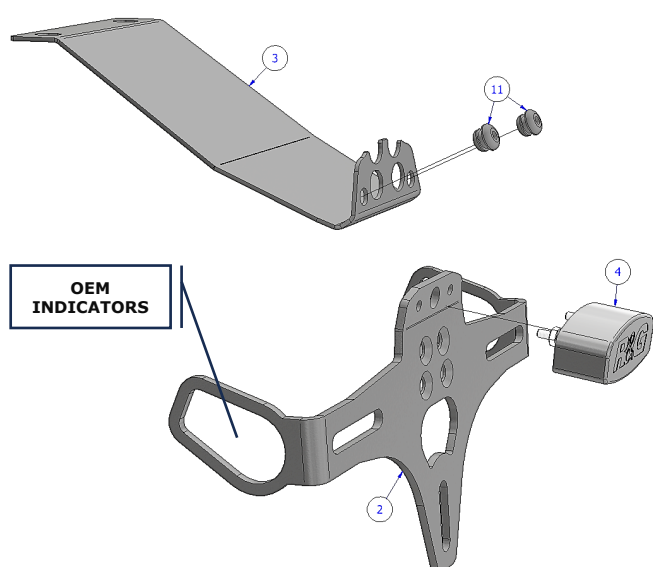


PICTURE 1

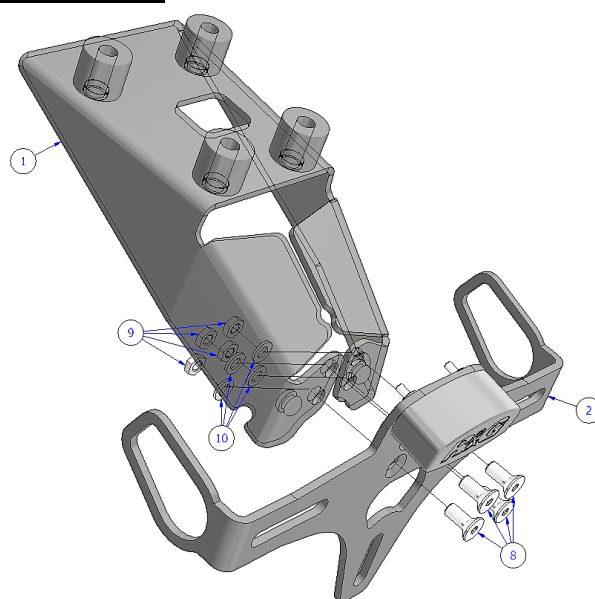


PICTURE 2

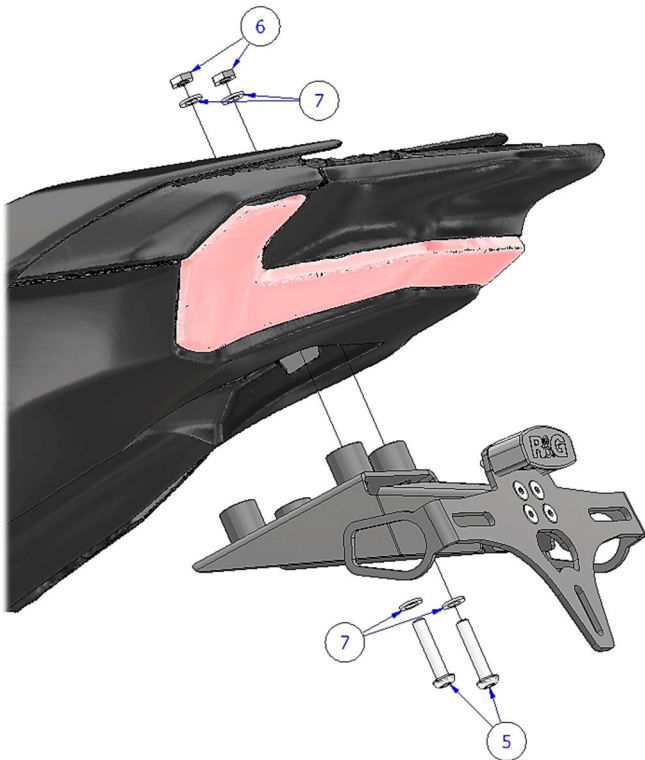

PICTURE 3

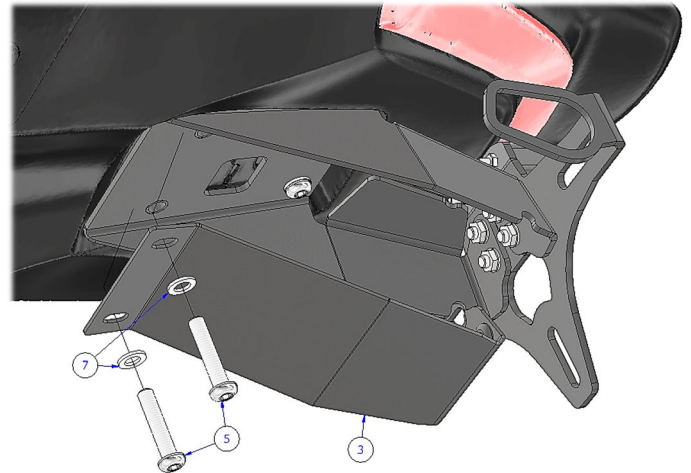

PICTURE 4

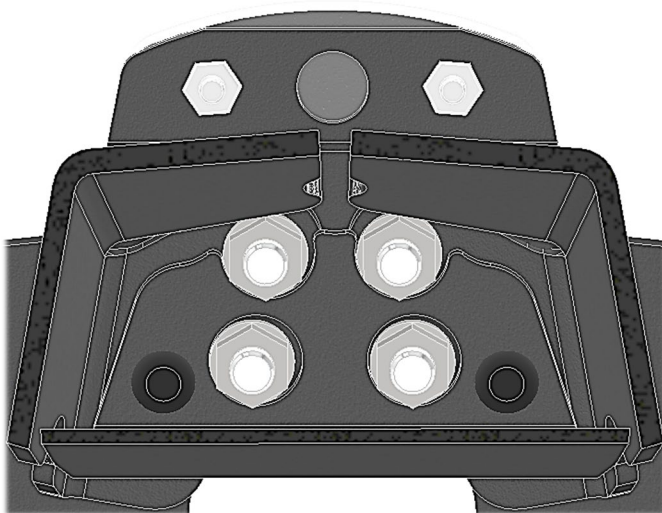

PICTURE 5



FITTING GUIDE

Disassembly Instructions:

- Remove the OEM seat unit and any tools etc from the storage compartment.
- Disconnect the wiring connectors coming through the undertray and into the tail unit.
- Remove the 4X bolts in the undertray, this will allow you to un-mount the OEM tail unit.
- Dismantle the OEM tail unit, keeping the indicators to one side for use with the R&G tail tidy.
- Re-assemble without the OEM indicators and store away safely.

Assembly Instructions:

- Using the supplied heat shrink, cover the number plate light wiring and indicator wiring (if necessary).
- Then fit the licence plate light (**Item 4**) to the licence plate bracket (**Item 2**).
- Fit the OEM indicators in the same way they were mounted to the OEM tail unit.
- Fit the supplied rubber bungs (**Item 11**) to the cover plate (**Item 3**) also shown in **Picture 1**.
- As shown in **Picture 2**; bolt the licence plate mounting bracket to the main mounting bracket using the supplied countersunk bolts (**Item 8**), washers (**Item 10**) and nyloc nuts (**Item 9**).

Fitting Instructions:

- Apply the 4X M6 washers (**Item 7**) onto the 4X M6 button head bolts (**Item 5**) ready for use, keeping the 4X M6 nyloc nuts & remaining washers close to hand.
- Holding the 2X bolts with washers in the rearward mounting positions, offer the assembly up to the bikes undertray and pass the exposed thread of the bolts through the mounting holes in the undertray.
- While holding the assembly in place, apply the washers and nyloc nuts to the exposed thread on the inside of the bike's storage compartment (See **Picture 3**).
- Fully tighten the bolts to their required torque setting while holding the other bolts in the forward mounting positions in order to keep the bracket aligned correctly.
- As shown in **Pictures 4**, offer up the cover plate (**Item 3**) with the supplied rubber bungs fitted, pushing the holes at the far end of the cover plate over the nuts on the back of the licence plate bracket (**Picture 5**)
- Making sure the indicator wires are secured in the slots to the side of the main bracket, push the remaining 2 bolts with washers through the main bracket and into the undertray, then apply the washers and nuts.
- Fully tighten the fasteners to their required torque setting.
- Re-connect the OEM indicator connectors to the wiring loom.



- Use the supplied connector to adapt the OEM wiring to the R&G number plate light.

IMPORTANT: FOR SAFETY, ENSURE THE LICENCE PLATE IS PLACED AS HIGH AS POSSIBLE ON THE TAIL TIDY (IT MAY REQUIRE DRILLING). IF FITTING A LICENCE PLATE OF 200MM OR LONGER (INCLUDING ANY SHROUD OR REFLECTOR ATTACHMENT) TO THE BRACKET, BEFORE RIDING, FULLY COMPRESS THE SUSPENSION TO ENSURE NO PART OF THE ASSEMBLY CAN CONTACT THE TYRE WHILE THE VEHICLE IS IN MOTION OR UNDER LOAD. IT IS YOUR RESPONSIBILITY TO CHECK FOR THIS POSSIBILITY AND TAKE AVOIDING ACTION. FAILURE TO CHECK THIS COULD RESULT IN SERIOUS INJURY OR DAMAGE TO THE MOTORCYCLE.

ISSUE 1 – 22/04/2025 (TB)

CONSUMER NOTICE

The catalogue description and any exhibition of samples are only broad indications of the Products and R&G may make design changes which do not diminish their performance or visual appeal and supplying them in such state shall conform to the order. The Buyer acknowledges no representation or warranty (other than as to title) has been given or will apply to the Products other than those in R&G's order or confirmation and the Buyer confirms it has chosen the Products as being of merchantable quality and suitable for its particular purposes. Where R&G fits the Products or undertakes other services it shall exercise reasonable skill and care and rectify any fault free of charge unless the workmanship has been disturbed. The Buyer is responsible for ensuring that the warranty on the motorcycle is not affected by the fitting of the Products. On return of any defective Products R&G shall at its option either supply a replacement or refund the purchase money but shall not be liable if the Products have been modified or used or maintained otherwise than in accordance with R&G's or manufacturer's instructions and good engineering practice or if the defect arises from accident or neglect. Other than identified above and subject to R&G not limiting its liability for causing death and personal injury, it shall not be liable for indirect or consequential loss and otherwise its liability shall be limited to the amounts paid by the Buyer for the Products or the fitting or service concerned. These terms do not affect the Buyer's statutory rights.

R&G RACING RETURNS POLICY (NON-FAULTY GOODS)

Returns must be pre-authorised (if not pre-authorised the return will be rejected). Goods may only be returned direct to us if they were purchased direct from us (customer must prove if necessary). Otherwise to be returned to original vendor. Goods must be in re-sellable condition, in the opinion of R&G Racing. All returns are subject to a 25% restocking and handling fee (25% of the gross value exc. P&P – at the prevailing price at time of purchase). The customer must pay any and all carriage charges. No returns of discontinued products, unless within 14 days of purchase. This policy does not affect your statutory rights and does not refer to faulty goods.



NOTICE DE MONTAGE LP0395BK
SUPPORT DE PLAQUE



CE KIT CONTIENT LES ARTICLES ILLUSTRÉS ET ÉTIQUETES SUR LA PAGE.

CERTAINES PARTIES PEUVENT ÊTRE PRÉSENTES UNIQUEMENT POUR LA CLARTÉ DES INSTRUCTIONS.

NE PAS PROCÉDER AU MONTAGE TANT QUE VOUS N'ÊTES PAS SÛR QUE TOUTES LES PIÈCES SOIENT PRÉSENTES.

VEUILLEZ LIRE TOUTES LES INSTRUCTIONS AVANT DE CONTINUER.

**EN CAS DE DOUTE LORS DU MONTAGE DE NOS PRODUITS, CONSULTEZ UN DE NOS
REVENDEURS OU FAITES APPEL À UN TECHNICIEN QUALIFIÉ.**

VEUILLEZ NOTER QUE LA FAÇON DONT LE KIT EST EMBALLÉ NE REPRÉSENTE PAS NECESSAIREMENT LA
MANIÈRE DE LE MONTER SUR LA MOTO.

SI DES RONDELLES EN CAOUTCHOUC SONT UTILISÉES POUR MAINTENIR LES COMPOSANTS SUR LES
BOULONS, ELLES PEUVENT ÊTRE JETÉES.

NOTICE DISPONIBLE AU TÉLÉCHARGEMENT SUR :
WWW.RG-RACING.COM



<u>OUTILS REQUIS</u>	<u>VALEURS DE SERRAGE</u>
• Clés Allen 5mm & 6mm. • Clé à cliquet + douilles 8mm, 10mm & 12mm. • Coupe-câble	M4 BOULON = 8Nm M5 BOULON = 12Nm M6 BOULON = 15Nm M8 BOULON = 20Nm M10 BOULON = 40Nm M12 BOULON = 40Nm

LÉGENDE

ARTICLE No.	DESCRIPTION	QTÉ
ARTICLE 1	SUPPORT DE PLAQUE PRINCIPAL	1
ARTICLE 2	SUPPORT DE PLAQUE	1
ARTICLE 3	PLAQUE DE COUVERTURE	1
ARTICLE 4	ÉCLAIRAGE DE PLAQUE	1
ARTICLE 5	M6X30mm BOULON	4
ARTICLE 6	M6 ÉCROU	4
ARTICLE 7	6X12mm RONDELLE	8
ARTICLE 8	M5X12mm BOULON	4
ARTICLE 9	M5 ÉCROU	4
ARTICLE 10	5x10mm RONDELLE	4
ARTICLE 11	BOUCHON EN CAOUTCHOUC	2


Racing Technique Ltd T/A R&G

Unit 1, Shelley's Lane, East Worldham, Alton, Hampshire, GU34 3AQ

Tel: +44 (0)1420 89007 Fax: +44 (0)1420 87301 www.rg-racing.com Email: info@rg-racing.com



Schéma d'ensemble

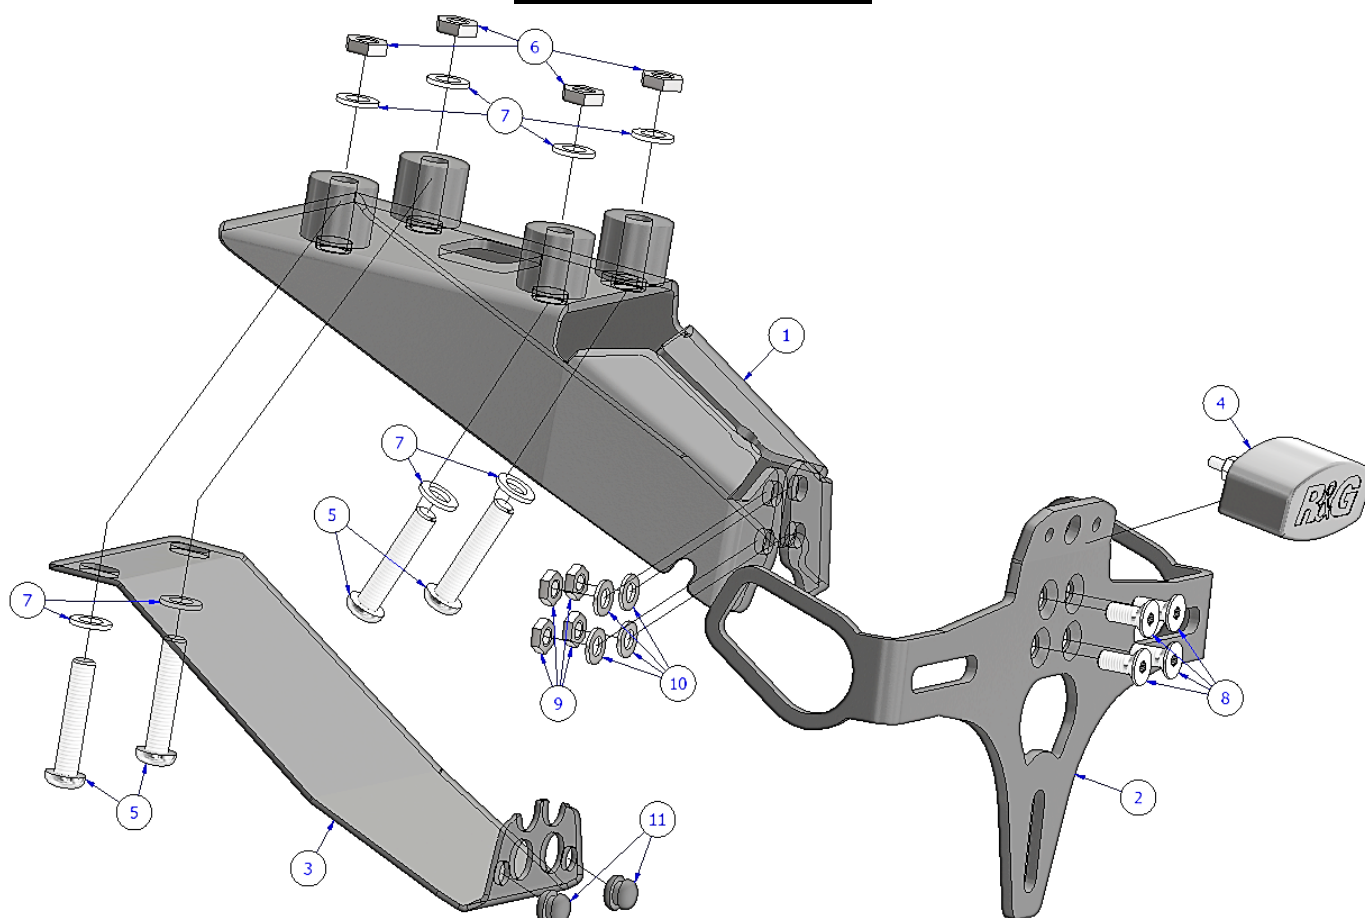

Photos de montage

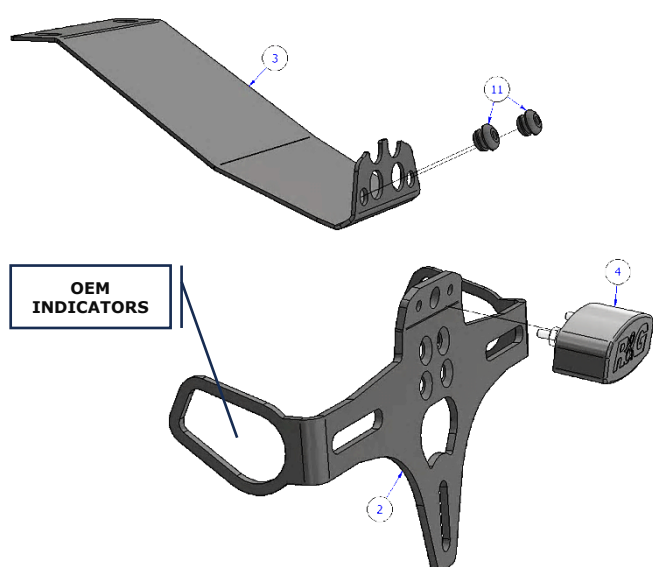


Photo 1

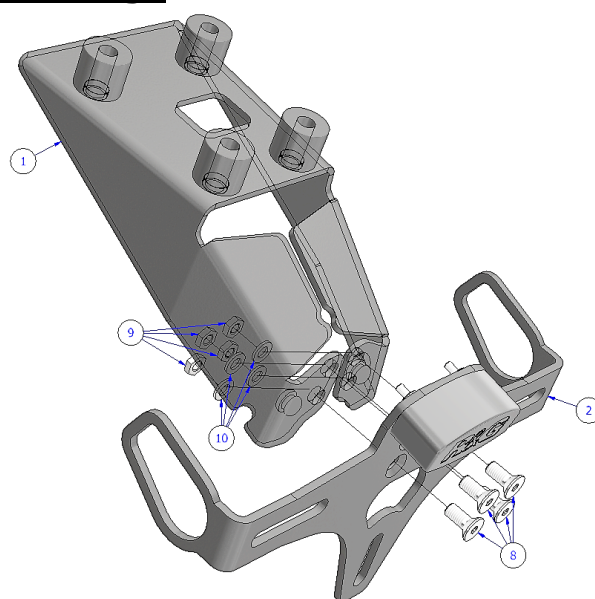


Photo 2

Racing Technique Ltd T/A R&G

Unit 1, Shelley's Lane, East Worldham, Alton, Hampshire, GU34 3AQ

Tel: +44 (0)1420 89007 Fax: +44 (0)1420 87301 www.rg-racing.com Email: info@rg-racing.com

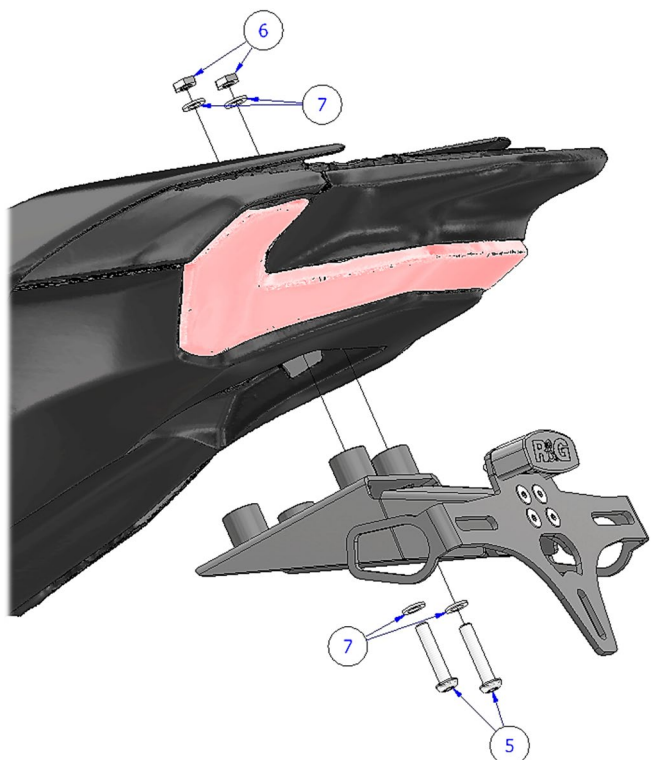


PHOTO 3

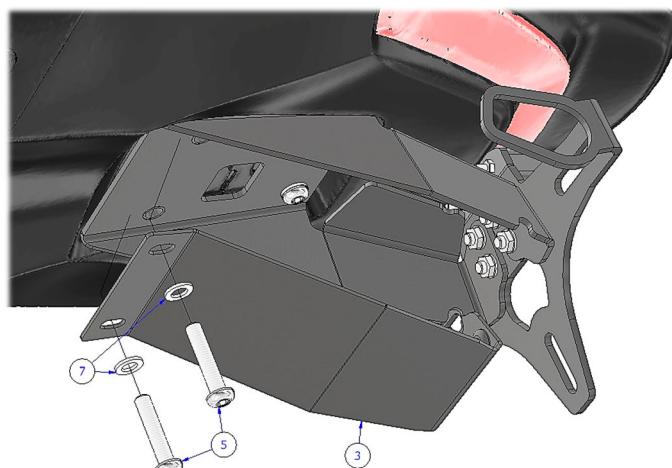


PHOTO 4

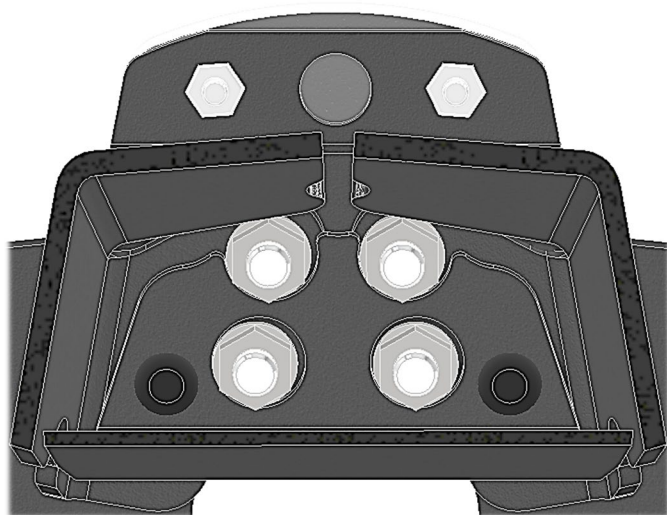


PHOTO 5



NOTICE DE MONTAGE

Notice de démontage :

- Retirez la selle d'origine et tous les outils, etc. du compartiment de rangement.
- Débranchez les connecteurs de câblage traversant le passage de roue et reliant le module arrière.
- Retirez les 4 boulons du passage de roue pour démonter le module arrière d'origine.
- Démontez le module arrière d'origine en conservant les clignotants pour les utiliser avec le support-bagages arrière R&G.
- Remontez sans les clignotants d'origine et rangez-les en toute sécurité.

Notice d'assemblage :

- À l'aide de la gaine thermorétractable fournie, recouvrez le câblage de l'éclairage de la plaque d'immatriculation et celui des clignotants (si nécessaire).
- Fixez ensuite l'éclairage de la plaque d'immatriculation (article 4) au support de plaque d'immatriculation (article 2).
- Installez les clignotants d'origine de la même manière qu'ils ont été montés sur le feu arrière d'origine.
- Fixez les bouchons en caoutchouc fournis (article 11) à la plaque de protection (article 3), également illustrée sur la photo 1.
- Comme illustré sur la photo 2, fixez le support de montage de la plaque d'immatriculation au support principal à l'aide des boulons à tête fraisée (article 8), des rondelles (article 10) et des écrous nyloc (article 9) fournis.).

Notice de montage :

- Fixez les 4 rondelles M6 (article 7) sur les 4 boulons à tête bombée M6 (article 5), prêts à l'emploi, en gardant les 4 écrous nyloc M6 et les rondelles restantes à portée de main.
- En maintenant les 2 boulons et leurs rondelles en position de montage arrière, approchez l'ensemble du passage de roue de la moto et faites passer le filetage apparent des boulons dans les trous de montage du passage de roue.
- Tout en maintenant l'ensemble en place, fixez les rondelles et les écrous sur le filetage apparent à l'intérieur du compartiment de rangement de la moto (voir photo 3).
- Serrez les boulons au couple de serrage requis tout en maintenant les autres boulons en position de montage avant afin de maintenir le support correctement aligné.

Racing Technique Ltd T/A R&G

Unit 1, Shelley's Lane, East Worldham, Alton, Hampshire, GU34 3AQ

Tel: +44 (0)1420 89007 Fax: +44 (0)1420 87301 www.rg-racing.com Email: info@rg-racing.com



- Comme illustré sur la photo 4, présentez la plaque de protection (article 3) munie des bouchons en caoutchouc fournis, en insérant les trous situés à l'extrémité de la plaque sur les écrous situés à l'arrière du support de plaque d'immatriculation (photo 5).
- Assurez-vous que les fils des clignotants soient bien fixés dans les fentes latérales du support principal. Insérez les deux boulons restants avec leurs rondelles à travers le support principal et dans le passage de roue, puis fixez les rondelles et les écrous.
- Serrez les fixations au couple de serrage requis.
- Rebranchez les connecteurs des clignotants d'origine au faisceau de câbles.
- Utilisez le connecteur fourni pour adapter le câblage d'origine à l'éclairage de plaque d'immatriculation R&G.

IMPORTANT : SI VOUS MONTEZ UNE PLAQUE D'IMMATRICULATION DE GRANDE TAILLE ET LA PLACEZ BIEN EN BAS SUR LE SUPPORT DE PLAQUE D'IMMATRICULATION, IL Y A UN RISQUE QUE LA PLAQUE D'IMMATRICULATION FRAPPE LA ROUE ARRIÈRE SOUS UNE CHARGE LOURDE ET SUR DE GROSSES BOSSES SUR LA ROUTE. IL EST DE VOTRE RESPONSABILITÉ DE VÉRIFIER CETTE POSSIBILITÉ ET DE PRENDRE DES MESURES POUR ÉVITER. NE PAS VÉRIFIER CELA POURRAIT ENTRAÎNER DES BLESSURES GRAVES.

ISSUE 1 – 22/04/2025 (TB)

CONSUMER NOTICE

The catalogue description and any exhibition of samples are only broad indications of the Products and R&G may make design changes which do not diminish their performance or visual appeal and supplying them in such state shall conform to the order. The Buyer acknowledges no representation or warranty (other than as to title) has been given or will apply to the Products other than those in R&G's order or confirmation and the Buyer confirms it has chosen the Products as being of merchantable quality and suitable for its particular purposes. Where R&G fits the Products or undertakes other services it shall exercise reasonable skill and care and rectify any fault free of charge unless the workmanship has been disturbed. The Buyer is responsible for ensuring that the warranty on the motorcycle is not affected by the fitting of the Products. On return of any defective Products R&G shall at its option either supply a replacement or refund the purchase money but shall not be liable if the Products have been modified or used or maintained otherwise than in accordance with R&G's or manufacturer's instructions and good engineering practice or if the defect arises from accident or neglect. Other than identified above and subject to R&G not limiting its liability for causing death and personal injury, it shall not be liable for indirect or consequential loss and otherwise its liability shall be limited to the amounts paid by the Buyer for the Products or the fitting or service concerned. These terms do not affect the Buyer's statutory rights.

R&G RACING RETURNS POLICY (NON-FAULTY GOODS)

Returns must be pre-authorized (if not pre-authorized the return will be rejected). Goods may only be returned direct to us if they were purchased direct from us (customer must prove if necessary). Otherwise to be returned to original vendor. Goods must be in re-sellable condition, in the opinion of R&G Racing. All returns are subject to a 25% restocking and handling fee (25% of the gross value exc. P&P – at the prevailing price at time of purchase). The customer must pay any and all carriage charges. No returns of discontinued products, unless within 14 days of purchase. This policy does not affect your statutory rights and does not refer to faulty

Racing Technique Ltd T/A R&G

Unit 1, Shelley's Lane, East Worldham, Alton, Hampshire, GU34 3AQ

Tel: +44 (0)1420 89007 Fax: +44 (0)1420 87301 www.rg-racing.com Email: info@rg-racing.com